



AAM 38 F BISS

BLIND HOLLOW SHAFT MULTITURN ABSOLUTE ENCODER

MAIN FEATURES

Miniaturized optical multturn absolute encoder for high end application. Thanks to BiSS-C interface and high resolution it can be used in robotics, motor feedback and CNC machines.

- Optical sensor technology (OptoASIC + Energy Harvesting)
- 39 bit total resolution (23 bit single turn + 16 bit multturn)
- Power supply +5 VDC with BiSS-C as electronic interface
- Cable output
- Blind hollow shaft diameter up to 8 mm
- Mounting by stator coupling
- Operating temperature -20° ... +105°C (-4° ... +221°F)





| ORDERING CODE | AAM | 38F | 16 | / | 23 | B | 5 | B | 8 | X | X | PR | .XXX |
|---|-----|-----|----|---|----|---|---|---|---|---|---|----|------|
| SERIES absolute multturn encoder | AAM | | | | | | | | | | | | |
| MODEL blind hollow shaft with stator coupling | | 38F | | | | | | | | | | | |
| MULTITURN RESOLUTION bit 16 | | | 16 | | | | | | | | | | |
| SINGLETURN RESOLUTION bit 23 | | | | / | 23 | | | | | | | | |
| CODE TYPE binary | | | | | | B | | | | | | | |
| POWER SUPPLY 5 V DC | | | | | | | 5 | | | | | | |
| ELECTRONIC INTERFACE BiSS-C | | | | | | | | B | | | | | |
| BORE DIAMETER mm (1/4") mm | | | | | | | | | 8 | | | | |
| ENCLOSURE RATING IP 50 | | | | | | | | | | X | | | |
| OPTIONS to be reported | | | | | | | | | | | X | | |
| OUTPUT TYPE radial cable (standard lenght 0,2m) | | | | | | | | | | | | PR | |
| VARIANT custom version | | | | | | | | | | | | | XXX |





OPTICAL MULTITURN ABSOLUTE ENCODERS | AAM 38 F BISS

AAM 38 F

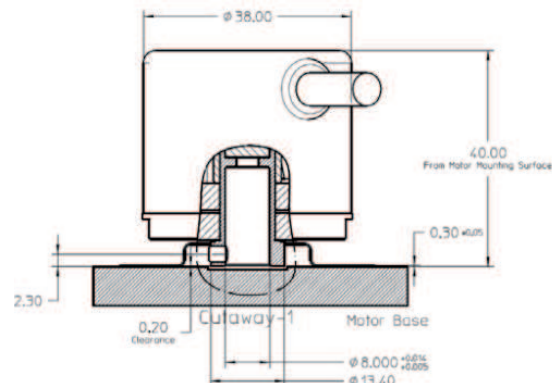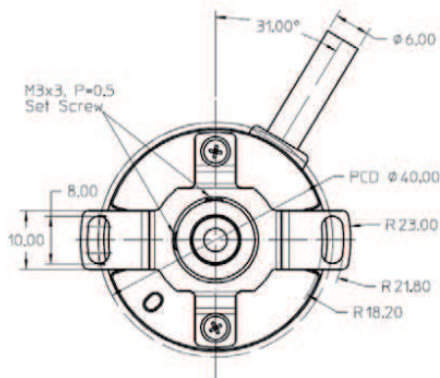

RECOMMENDED SHAFT AND MOUNTING HOLES REQUIREMENT

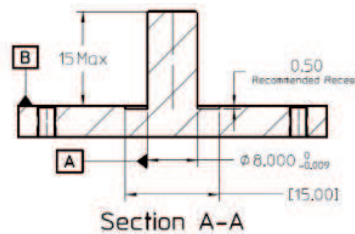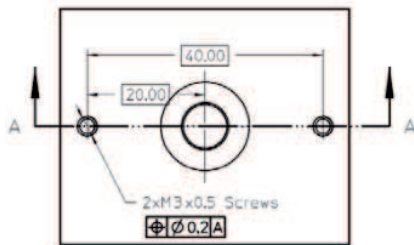

dimensions in mm

ELECTRICAL SPECIFICATIONS

| | |
|----------------------------------|--|
| Multiturn resolution | 16 bit |
| Singleturn resolution | 23 bit |
| Fault status | 8 bit |
| CRC | 8 bit |
| Power supply | 4,75 ... 5,25 V DC |
| Current consumption without load | < 120 mA |
| Output type | BiSS-C (SN65LBC179Q) |
| Code type | binary |
| Clock frequency (MA) | 80 kHz ... 10 MHz |
| Position Calculation Time | Refer to BiSS-C T _{busy time} |
| Accuracy | ± 80 arc-sec |
| Counting direction | decreasing clockwise (shaft view) |
| Start-up time | 500 ms |
| Electromagnetic compatibility | IEC 61000-6-2 IEC 61000-6-4 |

CONNECTIONS

| Function | Cable output |
|---------------------|--------------|
| + Vdc | red |
| Ground | black |
| serial data (SLO) + | orange |
| serial data (SLO) - | blue |
| serial clock (MA) + | brown |
| serial clock (MA) - | white |

MECHANICAL SPECIFICATIONS

| | |
|---------------------------------|--|
| Shaft diameter | ∅ 6 / 6,35 (1/4") / 8 mm |
| Enclosure rating | IP 50 (IEC 60529) |
| Rotation speed | 6000 rpm continuous |
| Shock | 200 G, 6 ms (IEC 60068-2-27) |
| Vibration | 10 G, 10 ... 2000 Hz (IEC 60068-2-6) |
| Shaft radial play allowed | ± 0,05 mm |
| Shaft axial play allowed | ± 0,1 mm |
| Shaft material | brass |
| Housing material | steel |
| Bearing stage material | aluminum |
| Bearings | 2 ball bearings |
| Bearings life | 10 ⁹ revolutions |
| Operating temperature | -20° ... +105°C (-4° ... +221°F) |
| Storage temperature | -20° ... +105°C (-4° ... +221°F) |
| Fixing torque for shaft grains | 1 Nm recommended |
| Fixing torque for spring screws | 0,35 Nm recommended for M3 screws (not provided) |
| Weight | 150 g (5,29 oz) |



© Copyright 2016 Eltra S.p.a. Unipersonale. All rights reserved. All informations in this catalog are subject to change without notice. Eltra takes no responsibility for typographic errors. For the terms of sales please check the website. REV. 160620


3

1985 - 2015
eltra@eltra.it | www.eltra.it

BISS-C TIMING DIAGRAM

| Parameter | Symbol | Value | | | Unit | Note |
|--------------|--------------------|---------------------------|---------|-----------------------------|---------|------|
| | | Min | Typical | Max | | |
| MA frequency | f_{MA} | 0,08 | – | 10 | MHz | 1 |
| Busy | T_{busy} | $2 / f_{MA} + 3,35 \mu s$ | – | $2,5 / f_{MA} + 3,75 \mu s$ | μs | 2 |
| Timeout | $t_{BISS-timeout}$ | $1,5 / f_{MA}$ | – | $1,5 / f_{MA} + 90 ns$ | ns | 2 |

Figure 1 Timing Characteristics of MA and SLO

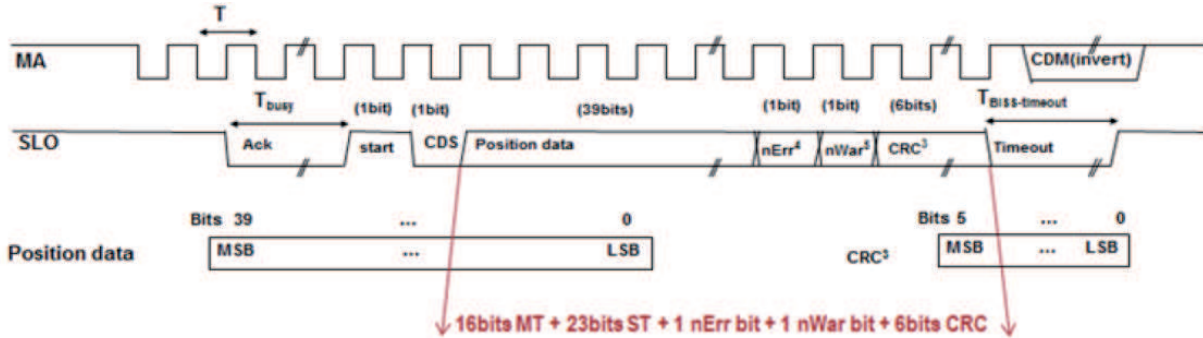

1. MA low-time = $0,50 / f_{MA}$; high-time = $0,50 / f_{MA}$
2. Refer to Figure 1 for timing description
3. CRC Polynomial = Invert of $(X^6 + X^1 + X^0)$
4. nErr bit is active low. (Combine all the Error Status and reflect in nERR bit)
5. nWar bit is active low. (Combine all the Warning Status and reflect in nERR bit)

Description

Refer to BiSS-C Interface Protocol Description Rev C5 document for detailed information of BiSS-C Register Communication.

http://biss-interface.com/files/Bissinterface_c5es.pdf

Figure 2 Register write access

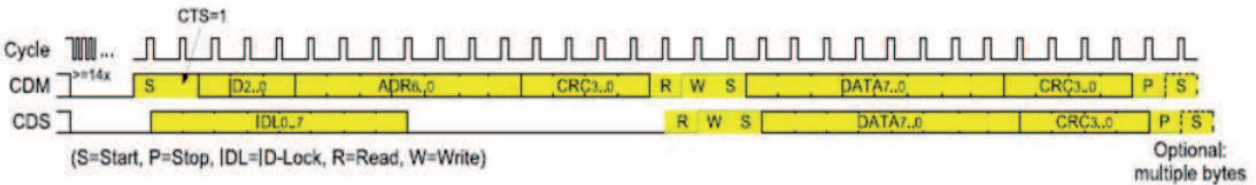


Figure 3 Register read access

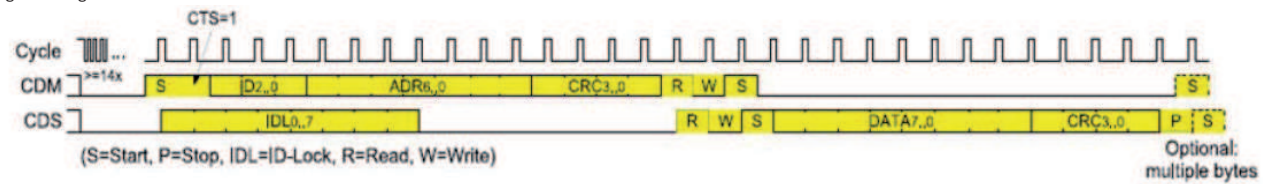


Figure 4 Writing several registers


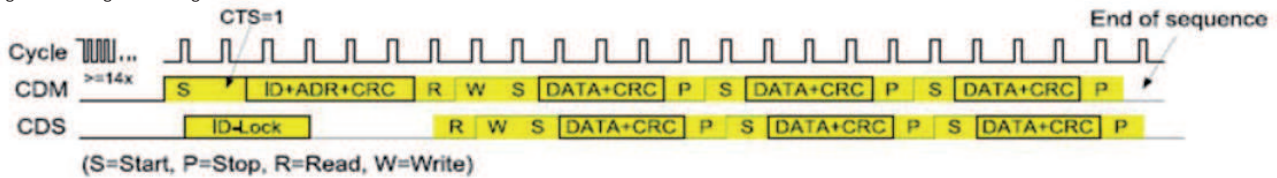


Figure 5 Reading several registers

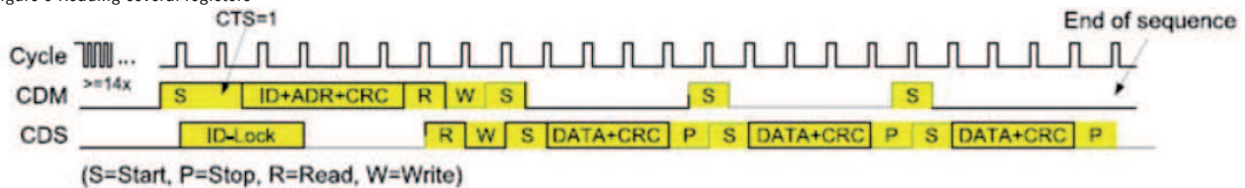

OPTICAL MULTITURN ABSOLUTE ENCODERS | AAM 38 F BISS

Refer to BiSS-C Interface Protocol Description Rev C5 document for detail information of BiSS-C Register Assignment.

There are a total of 10 register banks user areas (register bank 0 to register bank 9) that are accessible by users. The memory data is kept in nonvolatile memory.

REGISTER ASSIGNMENTS

| Address (Decimal) | Address (Hexadecimal) | Name | Size | Memo |
|-------------------|-----------------------|-----------------|-----------------------|------|
| 0 ... 63 | 0x00 ... 0x3F | Register bank | 64 bytes | |
| 64 | 0x40 | Bank selection | 0 ... 8 bits (1 byte) | a, b |
| 65 | 0x41 | EDS-Bank | 0 ... 8 bits (1 byte) | a,c |
| 66 ... 67 | 0x42 ... 0x43 | Profile ID | 16 bits (2 bytes) | c, d |
| 68 ... 71 | 0x44 ... 0x47 | Serial number | 32 bits (4 byte) | c, d |
| 72 ... 119 | 0x48 ... 0x77 | Slave register | 48 bytes | |
| 120 ... 125 | 0x78 ... 0x7D | Device ID | 48 bits (6 bytes) | c, d |
| 126 ... 127 | 0x7E ... 0x7F | Manufacturer ID | 16 bits (2 bytes) | c, d |

- a. If no blank switchover is used, the register should not be implemented
- b. Unused register contents must therefore be filled with "0"
- c. Register is protected against accidental writing
- d. The value is saved as a big endian; i.e., with the highest value byte at the lowest value address

| EEPROM Address | BiSS-C | | Memo | |
|----------------|--------|------------|---------------|---|
| | Page | Address | | |
| 000 ... 27Fh | 0 | 00 ...3Fh | User area | |
| | 1 | 00 ...3Fh | | |
| | 2 | 00 ...3Fh | | |
| | 3 | 00 ...3Fh | | |
| | 4 | 00 ...3Fh | | |
| | 5 | 00 ...3Fh | | |
| | 6 | 00 ...3Fh | | |
| | 7 | 00 ...3Fh | | |
| | 8 | 00 ...3Fh | | |
| 280 ... 2FFh | 9 | 00 ...3Fh | Reserved area | |
| | 10 | 00 ...3Fh | | |
| 300 ... 37Fh | 11 | 00 ...3Fh | | |
| | 12 | 00 ...3Fh | | |
| 380 ... 3BFh | 13 | 00 ...3Fh | | |
| | 14 | 00 ...3Fh | | |
| 3C0 ... 3FFh | - | 40h | | Bank selection |
| | | 41h | | EDS-Bank (User prohibited write) – Not Available |
| | | 42 ... 43h | | Profile ID (User prohibited write) |
| | | 44 ... 47h | | Serial Number (User prohibited write) |
| | | 48 ... 77h | | Slave Register (Refer to the Slave Register Description – user area) |
| | | 78 ... 7Dh | | Device ID (User prohibited write) |
| | | 7E ... 7F | | Manufacturer ID (User prohibited write) |

OPTICAL MULTITURN ABSOLUTE ENCODERS | AAM 38 F BISS

SLAVE REGISTER DESCRIPTION

Address 72 (0x48) - Error status [7...0]

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-----------------|------------------------|----------------|--------------------|----------------|
| NA | | | MLSErr Error | Multi-turnErr Error | STErr Error | MemoryErr Error | XCErr Error |

Address 73 (0x49) - Warning status [7...0]

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|-------|-------|--------------------|--------------------|
| NA | | | | | | Lis_Err Warning | LED_Err Warning |

Address 74 (0x4A) - Encoder Clear Command

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|---------------------------|-------------------------|----------------------|----------------------|
| NA | | | | Warning clear command* | Error clear command* | ST clear command* | MT clear command* |

* Encoder Clear Command operation

- a. Write 1 to execute one time clear command
- b. Only one command should be accessed for each time

Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com