



RAZTEC MOULDED CURRENT SENSOR RAZFL-204CQCG

PERFORMANCE CHARACTERISTICS

High performance, compact cable mounted current sensor for installation into rugged environments where a fully sealed product is required to assure reliability. The device is 200A rated, cannot be damaged by overload and is compatible with computer systems with its single 5V supply requirement.



CONFIGURATION

Maximum Ratings (Ta = 25°C)


Parameter	Symbol	Value	Unit
Operating Temperature	T _A	-40 to +85	°C
Storage Temperature	T _{stg}	-65 to +100	°C
Supply Voltage	V _s	8	V
Output sinking current	I _o	10	mA
Measured Current	I _m	Limited only by conductor	A

© Raztec (NZ) Ltd 2004-2013
www.raztec.co.nz





Characteristics ($T_A = 25^\circ\text{C}$, $V_s = 5\text{V}$)


Parameter	Symbol	Lower Limit	Typical	Upper Limit	Unit
Supply Current	I_s		9.2	12	mA
Supply Voltage	V_s	4.5	5.0	5.5	V
Current Range for < $\pm 1\%$ error (-25 to +85°C)	I_m	± 200			A
Null Output	V_o	2.49	2.50	2.51	V
Transfer Function (per turn)	$\Delta V/I$	9.8	10	10.2	mV/A
Combined non-linearity and hysteresis error ($\pm 200\text{A}$, -25 to +85°C)			0.5	1.5	%
Output error due to 5mm diameter wire position				± 0.1	%
Hysteresis (0 to 200AT)	Hys		0.1		%
Null drift due to temperature change	$TC_{\Delta V_o/V_o}$			± 0.25	mV/K
Gain Change due to temperature change	TC_G	-0.1	+0.1	0.18	%/K
Power-on settling time to 99%	t_{po}			15	μs
Risetime (10% to 90% of full scale)	t_r		5.5		μs
Response time (90% primary to 90% output)	t_{RESPONSE}		7		μs
Frequency Response	f_{-3dB}		50		kHz
Output Resistance	R_o		1		Ω
Electrical Isolation	V_d	600			V

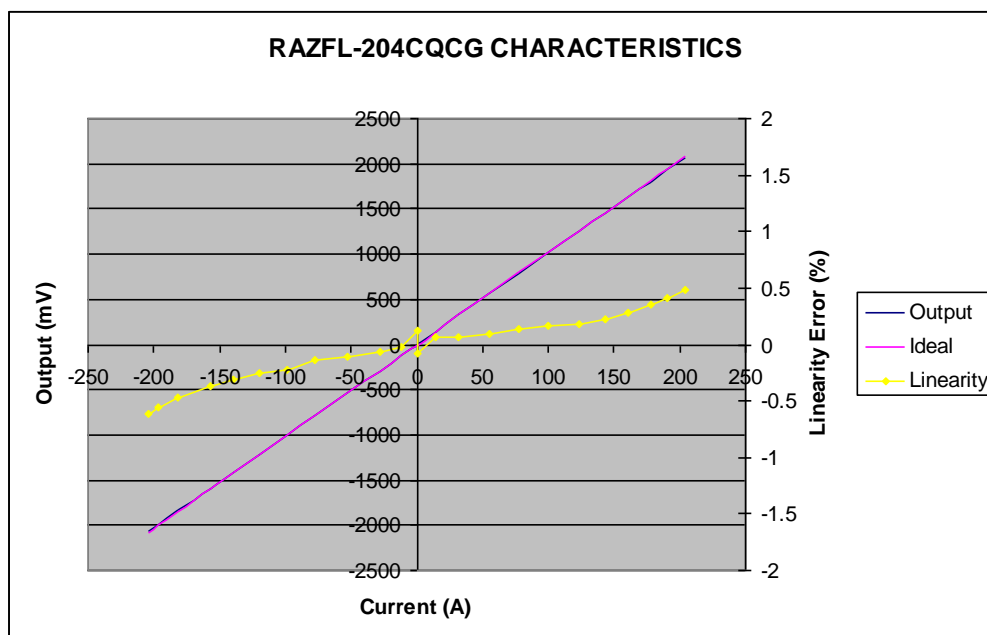

© Raztec (NZ) Ltd 2004-2013
www.raztec.co.nz

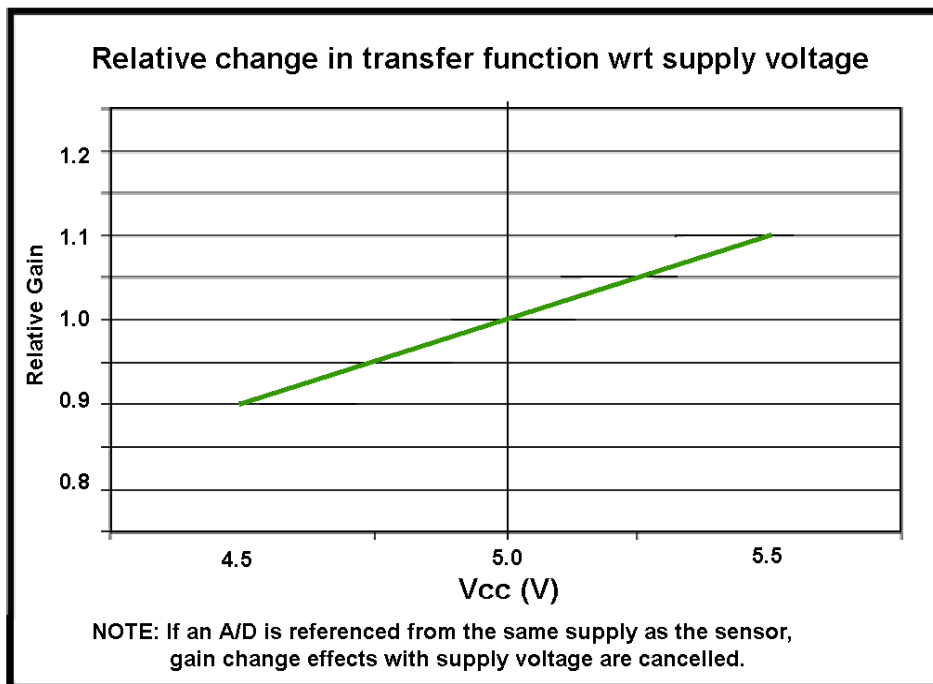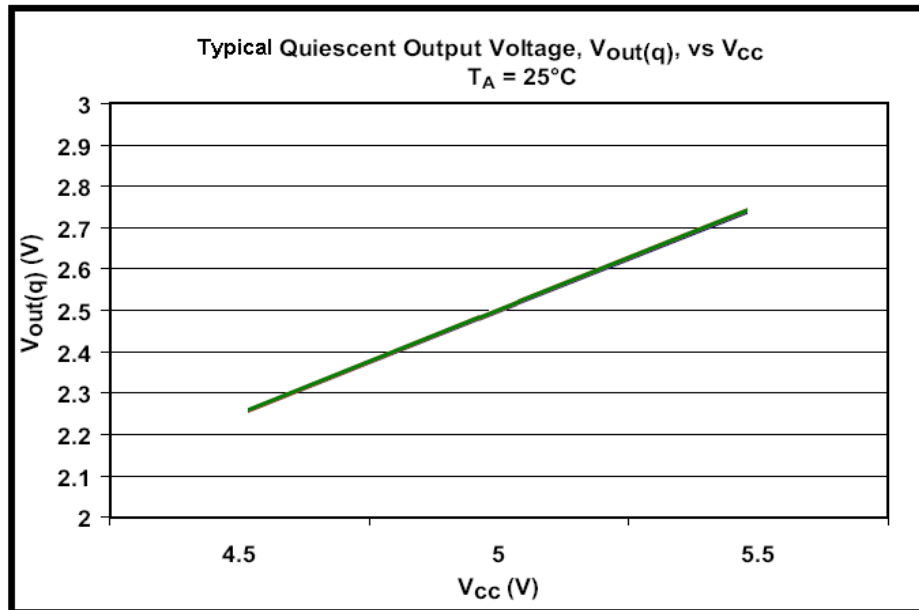

© Raztec (NZ) Ltd 2004-2013
www.raztec.co.nz

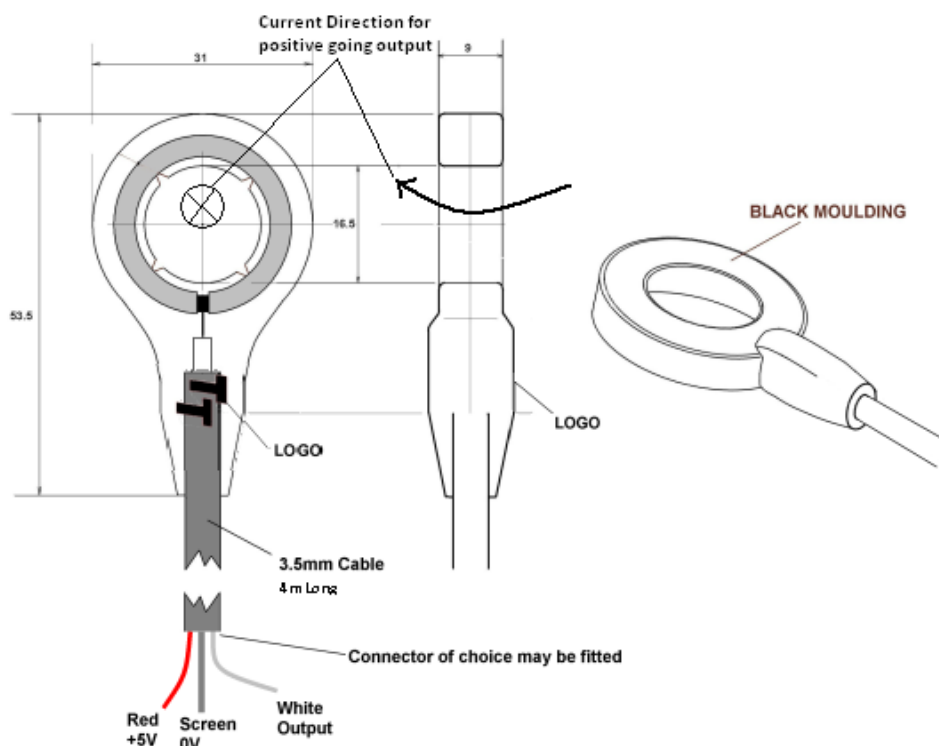

WARNING: Keep this product away from harsh chemical substances including cold cleaning agents, methylated spirits, FAM test spirits and battery acid.



Raztec (NZ) Ltd operates a continuous product improvement program, therefore information contained in our datasheets may not reflect all current features. For clarification please contact sales@raztec.co.nz

© Raztec (NZ) Ltd 2004-2013
www.raztec.co.nz

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Scan here and get an overview of personal contacts!



sensorsandpower.angst-pfister.com
