

### Description

The **EM2** is a transmissive optical encoder module designed to offer 2x or 4x higher resolution than the **EM1** encoder module. This module is designed to detect rotary position when used with a US Digital encoder disk. The **EM2** consists of a lensed LED source and a monolithic detector IC enclosed in a small polymer package that is identical to the **EM1**. The **EM2** uses phased array detector technology to provide superior performance and greater tolerances over traditional aperture mask type encoders.

The **EM2** provides digital A & B quadrature outputs with a third output index channel. Each **EM2** module is resolution specific and is matched to the resolution of an encoder disk. The **EM2** operates with a single 5V supply and provides single ended outputs which are capable of both sinking and sourcing 5mA. An internal 0.1 uF decoupling capacitor is designed into the **EM2** to provide enhanced noise immunity.

For open collector and higher voltage applications, add the PC3 cable driver, or for differential cable driver outputs, add the PC4 cable driver. Encoder disks, quadrature decoder chips, counter chips, computer interface boards, mating connectors and cables are also available.

Download the EM2/EM1 comparison chart.



### Features

- Two channel quadrature with index
- High resolution version of EM1
- Single 5V supply
- Rotary versions up to 10000 CPR
- Linear versions up to 2000 CPI
- Internal decoupling capacitor
- Outputs source/sink 5 mA


Rev. 180228115826

**US DIGITAL** **EM2** Transmissive Optical Encoder Module Page 2 of 7




**Mechanical Drawing**

EM2 Transmissive Optical Encoder Module



RELEASE DATE: 10/17/2013

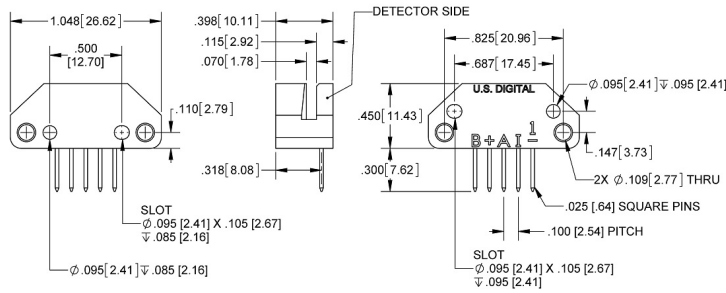


**US DIGITAL** 1400 NE 136th Avenue  
Vancouver, Washington 98684, USA  
info@usdigital.com www.usdigital.com  
Local: 360.260.2468  
Toll-free: 800.736.0194

UNITS: INCHES (MM)  
METRIC SHOWN FOR REFERENCE ONLY

**Linear Alignment**

EM2 Transmissive Optical Encoder Module  
Linear Strip Alignment

RELEASE DATE: 04/07/2015

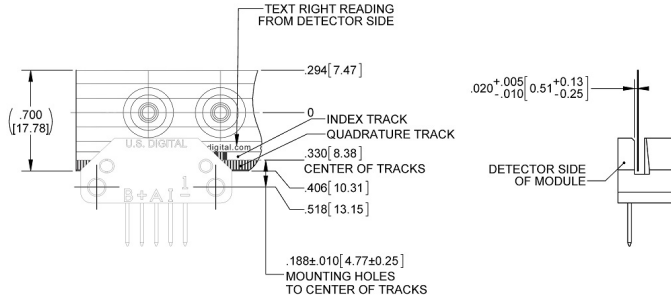

**US DIGITAL** 1400 NE 136th Avenue  
Vancouver, Washington 98684, USA  
info@usdigital.com www.usdigital.com  
Local: 360.260.2468  
Toll-free: 800.736.0194


UNITS: INCHES (MM)  
METRIC SHOWN FOR REFERENCE ONLY

Rev. 180228115826

 **EM2 Disk Alignment**

**EM2** Transmissive Optical Encoder Module  
Disk Alignment

RELEASE DATE: 12/21/2016

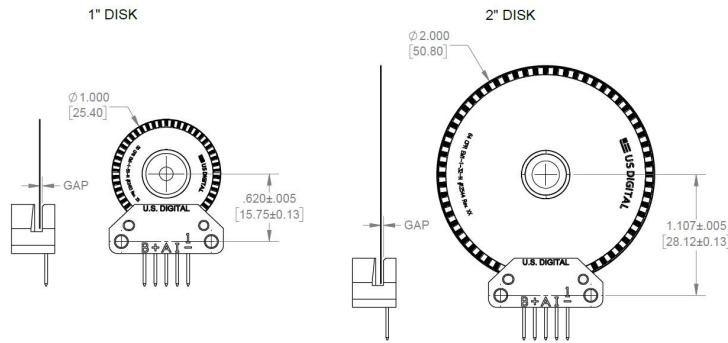

RECOMMENDED DISK GAP: .020 ± .005 [0.51 ± 0.13]

 **Available Resolutions**

CPR/CPI	EM2	HUBDISK-1	HUBDISK-2	LIN
1000	EM2-0-1000-*	-	-	LIN-1000-**-*
2000	EM2-1-2000-I (1") / EM2-0-2000- * (LIN)	HUBDISK-1-2000-**-IE	-	LIN-2000-**-*
2048	EM2-1-2048-I	HUBDISK-1-2048-**-IE	-	-
2500	EM2-1-2500-I	HUBDISK-1-2500-**-IE	-	-
3600	EM2-2-3600-I	-	HUBDISK-2-3600-**-IE	-
4000	EM2-1-4000-I (1") / EM2-2-4000-I (2")	HUBDISK-1-4000-**-IE	HUBDISK-2-4000-**-IE	-
4096	EM2-1-4096-I (1") / EM2-2-4096-I (2")	HUBDISK-1-4096-**-IE	HUBDISK-2-4096-**-IE	-
5000	EM2-1-5000-I (1") / EM2-2-5000-I (2")	HUBDISK-1-5000-**-IE	HUBDISK-2-5000-**-IE	-

Rev. 180228115826

CPR/CPI	EM2	HUBDISK-1	HUBDISK-2	LIN
7200	EM2-2-7200-I	-	HUBDISK-2-7200-*IE	-
8000	EM2-2-8000-I	-	HUBDISK-2-8000-*IE	-
8192	EM2-2-8192-I	-	HUBDISK-2-8192-*IE	-
10000	EM2-2-10000-I	-	HUBDISK-2-10000-*IE	-

## Operating Conditions

Parameter	Min.	Max.	Units	Notes
Temperature	-25	100	C	
A/B Output Frequency	0	360	kHz	2000, 2048, 2500 CPR (1") 3600, 4000, 4096, 5000 CPR (2") 1000 CPI (Linear)
	0	720	kHz	4000, 4096, 5000 CPR (1") 7200, 8000, 8192, 10000 CPR (2") 2000 CPI (Linear)
Disk RPM	0	(21.6 x 10 <sup>6</sup> ) / CPR	RPM	2000, 2048, 2500 CPR (1") 3600, 4000, 4096, 5000 CPR (2")
	0	(43.2 x 10 <sup>6</sup> ) / CPR	RPM	4000, 4096, 5000 CPR (1") 7200, 8000, 8192, 10000 CPR (2")
Linear Strip Speed	0	360	in./sec.	1000, 2000 CPI (Linear)
Disk/Linear Strip Radial Position Tolerance	± .005		inch	with gap set by standard spacer tool

## Electrical Specifications

- Specifications apply over entire operating temperature/voltage range.
- Typical values are specified at Vcc = 5.0V and 25C.

Parameter	Min.	Typ.	Max.	Units	Conditions
Supply Voltage	4.5	5.0	5.5	V	Ripple < 100 mVpp
Supply Current		72	85	mA	no load
Low-level Output			0.5	V	IOL = 5 mA
		0.25		V	no load
High-level Output	2.0			V	IOH = -5 mA
		3.5		V	no load

Rev. 180228115826

Parameter	Min.	Typ.	Max.	Units	Conditions
Output Current Per Channel	-5		5	mA	
Load Capacitance			100	pF	
Output Rise Time		50		nS	± 5 mA load
Output Fall Time		50		nS	± 5 mA load
Electrostatic Discharge			± 4	kV	IEC 61000-4-2


## Timing Characteristics

### Encoding Characteristics:

- › Specifications apply over entire operating temperature/voltage range.
- › Values are for the worst error over full rotation.
- › Refer to timing diagram below.

Parameter	Symbol	Min.	Typ.	Max.	Units
Symmetry	X, Y	108	190	252	° e
Quadrature	Z	45	90	135	° e
Index Pulse Width	Po	45	90	135	° e
Ch. I Rise After Ch. B or Ch. A Fall	t1		-40		ns
Ch. I Fall After Ch. B or Ch. A Rise	t2		25		ns

### Timing Diagram:

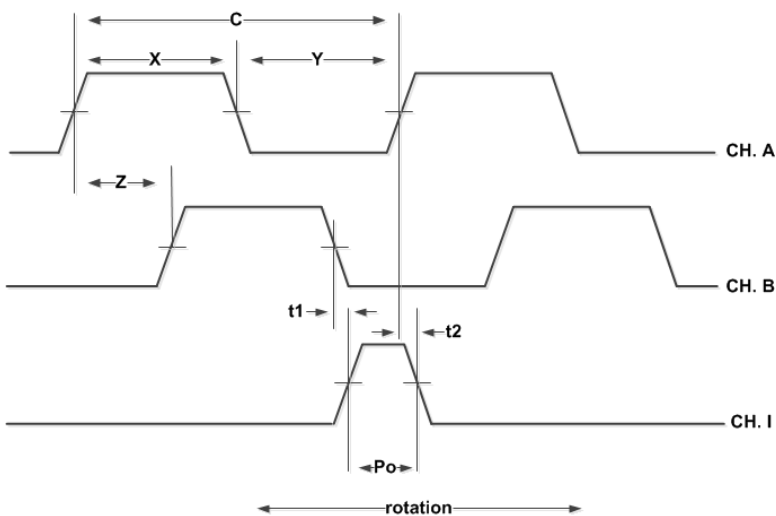

**CPi:** The number of Cycles (C) of the A or B output Per Inch of linear strip movement.

Rev. 180228115826

**CPR:** The number of Cycles (C) of the A or B outputs Per Revolution.

**Index (I):** The index output goes high once per revolution, coincident with the low states of channels A and B, nominally 1/4 of one cycle ( $90^\circ \text{ e}$ ).

**One Shaft Rotation:** 360 mechanical degrees.

**One Electrical Degree ( $^\circ \text{ e}$ ):** 1/360th of one cycle.

**One Cycle:** 360 electrical degrees ( $^\circ \text{ e}$ ). Each cycle can be decoded into 1 or 4 states, referred to as X1 or X4 resolution multiplication.

**PPR:** The number of resolvable Positions Per Revolution of the encoder disk with x4 quadrature decoding.

**Quadrature (Z):** The phase lag or lead between channels A and B in electrical degrees, nominally  $90^\circ \text{ e}$ .

**Symmetry:** A measure of the relationship between (X) and (Y) in electrical degrees, nominally  $180^\circ \text{ e}$ .



## Installation Torque

Parameter	Torque
Mounting Screws	3.5-4 in-lbs



## Pin-outs

Pin	Description
1	Ground
2	Index
3	A channel
4	+5VDC power
5	B channel

Rev. 180228115826

### Notes

- US Digital® warrants its products against defects in materials and workmanship for two years. See complete warranty for details.

### Ordering Information

EM2 -  -  -

Native OD	Native CPI/CPR	Index
0Linear	1000 =	I = <i>Index</i>
1 = <i>1in</i>	2000 =	N = <i>No Index</i>
2 = <i>2in</i>	2048 =	
	2500 =	
	3600 =	
	4000 =	
	4096 =	
	5000 =	
	7200 =	
	8000 =	
	8192 =	
	10000 =	

Rev. 180228115826

Headquarter Switzerland:  
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
sensorsandpower@angst-pfister.com

Office Germany:  
Angst+Pfister Sensors and Power  
Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 0  
sensorsandpower.de@angst-pfister.com



## We are here for you. Addresses and Contacts.

### Sales Germany & Austria

Geometrical sensors  
Other products

Kurt Stritzelberger  
Phone +49 89 374 288 87 22  
kurt.stritzelberger@angst-pfister.com

Pressure sensors  
Other products

Gerhard Vetter  
Phone +49 89 374 288 87 26  
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei  
Phone +41 44 877 35 18  
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

### Sales International Key Accounts

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Other Countries / Product Management

Pressure Sensors  
Load Cells

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@angst-pfister.com

Gas sensors  
Gas sensor modules

Dr. Thomas Clausen  
Phone +49 89 374 288 87 24  
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 89 374 288 87 67  
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@angst-pfister.com

Linear position sensors  
Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@angst-pfister.com

Accelerometers  
Sensor elements

Christoph Kleye  
Phone +49 89 374 288 87 61  
christoph.kleye@angst-pfister.com

Drive technology  
CH Postcode 5000 – 9999 / DE

Roman Homa  
Phone +41 76 444 00 86  
roman.homa@angst-pfister.com

Drive technology  
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

Harald Thomas  
Phone +49 89 374 288 87 23  
harald.thomas@angst-pfister.com