

## Characteristics


Unless otherwise specified, all parameters are measured at 25 °C and 60% RH

Parameters	Min	Typ	Max	Unit
Excitation <sup>1</sup>	1.8		3.6	
Pressure range	0		16	bar abs
Resolution			16	Bit
Zero Output (0 bar abs) <sup>2</sup>		6553		Dec
Full Scale Output (16 bar abs)		58983		Dec
Accuracy(25°C)		0.5		%FS, +1LSB
Accuracy(0/50°C) <sup>3</sup>		1.5		%FS, +1LSB
Accuracy(-10/70°C)		2.5		%FS, +1LSB
Update Rate		200		Hz
Over Pressure <sup>4</sup>			1.5X	Rated Pressure
Burst Pressure <sup>4</sup>			3X	Rated Pressure
Temp - Compensating	0		50	°C
Temp - Operating	-20		+85	°C
Temp - Storage	-40		+125	°C


### NOTES:

- Output is non-ratiometric to supply
- Zero absolute pressure
- Incl. NOL, hysteresis, TCS & TCO, 0/50°C
- Whole sensor is pressurized, 10/70 deg C
- Minimum pull-up on SDA and SCL is 1K $\Omega$
- Wetted material contains polymer moisture insulation and gold on pads
- Slave address valid range upon request: 00 HEX to 7F HEX (default: 00 HEX)

## Dimension

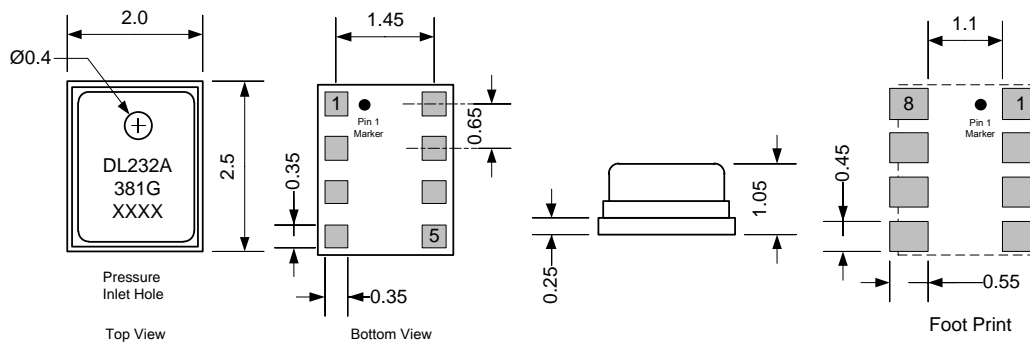

## Ordering Information

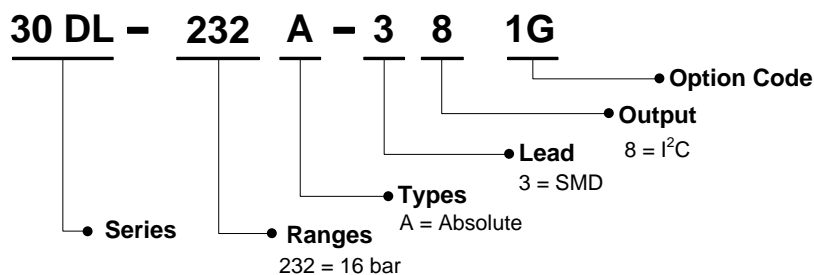

Pads	Description
1	n.c.
2	SCL
3	n.c.
4	EOC
5	GND
6	V <sub>DD</sub>
7	SDA
8	n.c.

## We are here for you. Addresses and Contacts.

---

### Headquarter Switzerland:

Angst+Pfister Sensors and Power AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
[sensorsandpower@angst-pfister.com](mailto:sensorsandpower@angst-pfister.com)

### Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 00  
[sensorsandpower.de@angst-pfister.com](mailto:sensorsandpower.de@angst-pfister.com)

---

Scan here and get an overview of personal contacts!



[sensorsandpower.angst-pfister.com](https://sensorsandpower.angst-pfister.com)

---