

# Series AC3055



## 10 mBar

### High Linearity Pressure Sensor Die

The AC3055 series of very low pressure die is an extension of the AC3050 low pressure series, meant specifically for passive compensation sensor modules. Despite a die size that is much smaller than traditional low-pressure die, it provides improved zero-stability, reduced g-sensitivity and reduced sensitivity to humidity.


The AC3055 is based on the same structure and sensing element of the AC3050 but optimized for improved linearity in the 10 mBar full-scale range. The improved linearity of upwards of 3X over the AC3050 comes at a small sacrifice in maximum sensitivity of about 85% of the AC3050 die. In addition to these standard pressure ranges, the die is available for higher full-scale ranges on a special order basis.

Suitable for a wide range of packages, it is particularly designed for low-pressure differential sensing where the die may be used in an uncompensated package or in a passively compensated design where no correction can be made for linearity errors. The AC3055 finds uses in such applications as HVAC, air-flow and a variety of industrial pressure and flow applications.

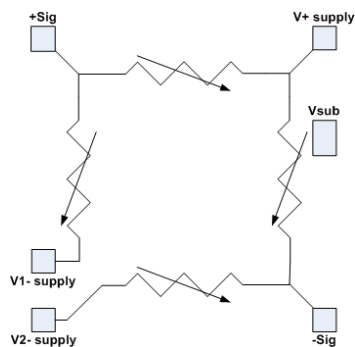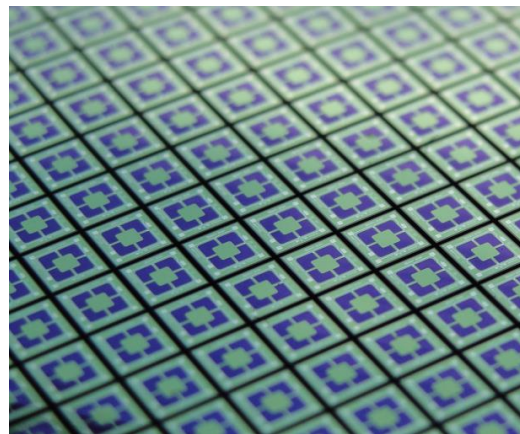

#### Equivalent Circuit Diagram

For maximum performance,  $V_{Sub}$  should be tied to the highest voltage in the circuit.

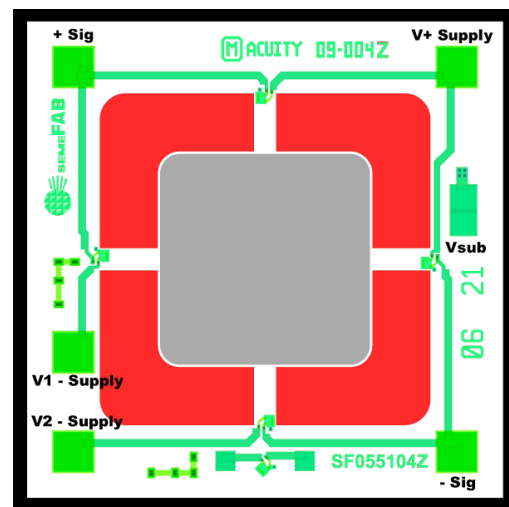

#### Pin-out of AC3055Low-P Pressure Die

+ Sig increases and -Sig decreases when pressure is applied to the top of the die

Specification		Low Pressure Sensor - AC3055				Note
Mechanical		Min	Nominal	Max	Unit	
Stepping size	X	1.899	1.900	1.901	mm	
	Y	1.899	1.900	1.901	mm	
Unconstrained wafer thickness	Z	0.401	0.406	0.411	mm	
Electrical						
Resistance						
Bridge resistance		3.25	3.70	4.25	kohms	1
TCR		2300	2800	3100	ppm/degree C	2
Resistance Ratiometricity		-1.0	0.1	1.0	%	3
Offset						
Offset - No Pressure		-100.0	0.0	25.0	mV	1
Offset Ratiometricity		-0.2	0	0.2	mV/V	3
TCO		-25	2	25	microV/V/degree C	2
Leakage						
Current Leakage - individual		0.1	2.1	20	nA	4
Sensitivity						
Sensitivity		24	40	60	mV	5
TCS		-2100	-1800	-1400	ppm/degree C	2
Pressure Nonlinearity		-0.25	0.08	0.25	%	6
Pressure Nonlinearity - F/B		-0.25	0.08	0.25	%	7
Mechanical Pressure						
Full Scale Pressure Ranges		10			mBar	8
Overpressure - Burst		>30X			FS Pressure	
Overpressure - Proof		>10X			FS Pressure	

**Note**

- 1 Measured at 5.0 volts
- 2 Measured at +25 and +75 °C, normalized by reading at 25 °C
- 3 Measured at -2.5 and 5.0 Volts, normalized by reading at 5.0 volts
- 4 Measured from VSub substrate contact to any Resistor Pad at 10 V
- 5 Full scale output at 5 Volt drive and rated pressure
- 6 1/2 TBNL (Terminal Base Nonlinearity at 0, 50%, and 100% FS) with topside pressure
- 7 Ratio of sensitivity with +FS and - FS pressures applied
- 8 For custom pressure ranges, consult APSP.

**Ordering Information:****AC3055-XXX**

where XXX=010 for 10 mBar.

APSP reserves the right to make changes to its products and specifications at any time, without notice. All sales are made pursuant to APSP standard terms and conditions of sale. While the information in this publication has been checked, APSP makes no representations or warranties other than as specifically set forth in the terms and conditions of sale. APSP assumes no responsibility for the use of any information or products described herein, conveys no license under any patent or other right, and makes no representation that the information or products are free of patent infringement. APSP does not recommend the use of any of its products in life support or other critical applications. Products are not authorized for use in such applications and customer assumes the full risk of any such use. APSP and the APSP logo are trademarks of APSP.

## We are here for you. Addresses and Contacts.

---

### Headquarter Switzerland:

Angst+Pfister Sensors and Power AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
[sensorsandpower@angst-pfister.com](mailto:sensorsandpower@angst-pfister.com)

### Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 00  
[sensorsandpower.de@angst-pfister.com](mailto:sensorsandpower.de@angst-pfister.com)

---

Scan here and get an overview of personal contacts!



[sensorsandpower.angst-pfister.com](https://sensorsandpower.angst-pfister.com)

---