


# Beck.

The adjustable  
pressure switches Prescal®  
in Ex zones.



# Pressure switch 901..Ex Prescal®

with adjustable switching pressure  
for Ex zones 0, 1 and 2



## Application

Adjustable pressure switch monitoring overpressure, vacuum or differential pressure of liquid and gaseous – also aggressive – media.

The pressure switch uses a scaled adjustment knob to enable the adjustment of trip and reset pressure without the use of a screwdriver.

## Specifications

Medium	air, (non-)combustible and aggressive gases and vapours
Temperature ranges: Medium and ambient temperature	-20° C to +85° C
Storage temperature	-40° C to +85° C
Trip pressure ranges:	
Overpressure	5 to 20 mbar (min. measuring range) 7 to 12 bar (max. measuring range)
Vacuum	-5 to -20 mbar (min. measuring range) -300 to -700 mbar (max. measuring range)
Differential pressure	5 to 20 mbar (min. measuring range) 10 to 50 mbar (max. measuring range)
Max. working overpressure	0.2 to 25 bar/-1 bar (refer to table)
Switching differential	3 to 2,000 mbar; depending on pressure range (refer to table)
Trip pressure tolerance	± 10% from setpoint
Materials:	
Tube connections	5 / 6.5 and 10 mm, PA / PPS
Threaded connections	M10x1 / G1/8 to G1/2 PA/PVDF/stainless steel/brass
Diaphragm	depending on medium; NBR, silicone, FKM (Viton®), EPDM, for 901.8x silicone (other materials on request).
Weight	30 to 300 g (depending on housing material)
Electrical rating	24 VDC/100 mA; 30 VDC/45 mA
Electrical connection	AMP flat plug, 6.3 mm x 0.8 mm, acc. to DIN 46244, or push-on screw terminals
Cable conduit	M16x1.5, with integrated cable strain relief
Protection category	IP 54 (with cover 6371)
Mechanical working life	over 10 <sup>6</sup> switching operations
Reducing nozzles	diameter optionally 0.3/0.5/0.8 mm

## ATEX

EC type examination  
Device category  
Ignition protection type  
CE conformity

BVS 06 ATEX E 141X  
II 1/2G or II 2G  
Ex ia IIB T4 or Ex ia IIC T4  
ATEX Directive 94/9/EC  
RoHS-Directive 2002/95/EC  
EC Gas Device Directive  
90/396/EC

Other approvals

type examination by TÜV Südwest and DVGW


## Ex i-circuits

This pressure switch can be used in potentially explosive zones 0, 1 and 2. In the safe area, an associated isolating means (separating barrier, switching amplifier) must be connected before. The entire isolating circuit must then be proved to keep inherent safety.

For this purpose, the power specifications (P, I, U) of the barrier must be lower and the characteristics (L, C) higher than those of the pressure switch and of the connection line (blue colour).


Characteristics for IIB, C:

Voltage	- U <sub>i</sub>	24 VDC/30 VDC
Current	- I <sub>i</sub>	100 mA/45 mA
Capacitance	- C <sub>i</sub>	0 µF
Inductance	- L <sub>i</sub>	0 mH

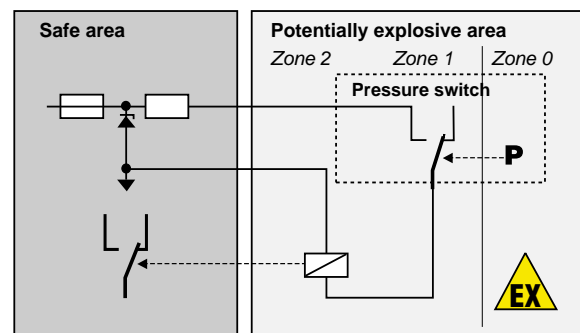


## Arrangement of contacts

for 901.6x Ex, 901.8x Ex,  
901.9x Ex



only for 901.7x Ex



**Pressure connections**

Type	Tube connections			Threaded connections			
	5.0 mm	6.5 mm	10.0 mm	M10 x1	G1/8	G1/4	G1/2
901.61-65 Ex	PA	PA, PPS	PA, PPS	PA, PVDF, MS, V <sub>2</sub> A	PA, PVDF, MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	MS
901.66-68 Ex				MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	MS
901.71-76 Ex	PA	PA, PPS	PA, PPS	PA, PVDF, MS, V <sub>2</sub> A	PA, PVDF, MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	
901.77-78 Ex				MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	MS
901.81 Ex		PA					
901.91-93 Ex				MS	MS, V <sub>2</sub> A	MS, V <sub>2</sub> A	

PPA = polyamide, PVDF = polyvinylidene fluoride, PPS = polyphenylsulfide, MS = brass

**Overpressure ranges**

Type	Setting range for		Reference scale accuracy	Switching differential	Maximum positive working pressure standard/extended	Maximum negative working pressure standard/extended
	between	and				
901.61 Ex	5	20 mbar	± 10 %	3 mbar	0.5/4 bar	-/-1 bar
901.62 Ex	10	50 mbar	± 10 %	5 mbar	0.5/4 bar	-/-1 bar
901.63 Ex	25	100 mbar	± 10 %	10 mbar	0.5/4 bar	-/-1 bar
901.64 Ex	50	250 mbar	± 10 %	20 mbar	1/4 bar	-/-1 bar
901.65 Ex	100	500 mbar	± 10 %	50 mbar	1/4 bar	-/-1 bar
901.66 Ex	250	1,000 mbar	± 10 %	150 mbar	10 bar	-1 bar
901.67 Ex	500	1,500 mbar	± 10 %	250 mbar	10 bar	-1 bar
901.68 Ex	1,000	3,000 mbar	± 10 %	500 mbar	10 bar	-1 bar
901.91 Ex	1.0	6.0 bar	± 10 %	0.5 – 2.0 bar	25 bar	-1 bar
901.92 Ex	4.0	9.0 bar	± 10 %	0.5 – 2.0 bar	25 bar	-1 bar
901.93 Ex	7.0	12.0 bar	± 10 %	0.5 – 2.0 bar	25 bar	-1 bar

**Vacuum ranges**


901.71 Ex	- 5	- 20 mbar	± 10 %	3 mbar	0.5/4 bar	-1 bar
901.72 Ex	- 10	- 50 mbar	± 10 %	5 mbar	0.5/4 bar	-1 bar
901.73 Ex	- 25	- 100 mbar	± 10 %	10 mbar	0.5/4 bar	-1 bar
901.74 Ex	- 50	- 125 mbar	± 10 %	20 mbar	0.5/4 bar	-1 bar
901.75 Ex	- 75	- 200 mbar	± 10 %	25 mbar	1/4 bar	-1 bar
901.76 Ex	- 100	- 300 mbar	± 10 %	30 mbar	1/4 bar	-1 bar
901.77 Ex	- 200	- 500 mbar	± 10 %	75 mbar	1/4 bar	-1 bar
901.78 Ex	- 300	- 700 mbar	± 10 %	75 mbar	1/4 bar	-1 bar

**Differential pressure ranges**

901.81 Ex	5	20 mbar	± 10 %	3 mbar	100 mbar	-100 mbar
901.82 Ex	10	50 mbar	± 10 %	5 mbar	100 mbar	-100 mbar

# Pressure switch 901..Ex Prescal®

with adjustable switching pressure for Ex zones 0, 1 and 2

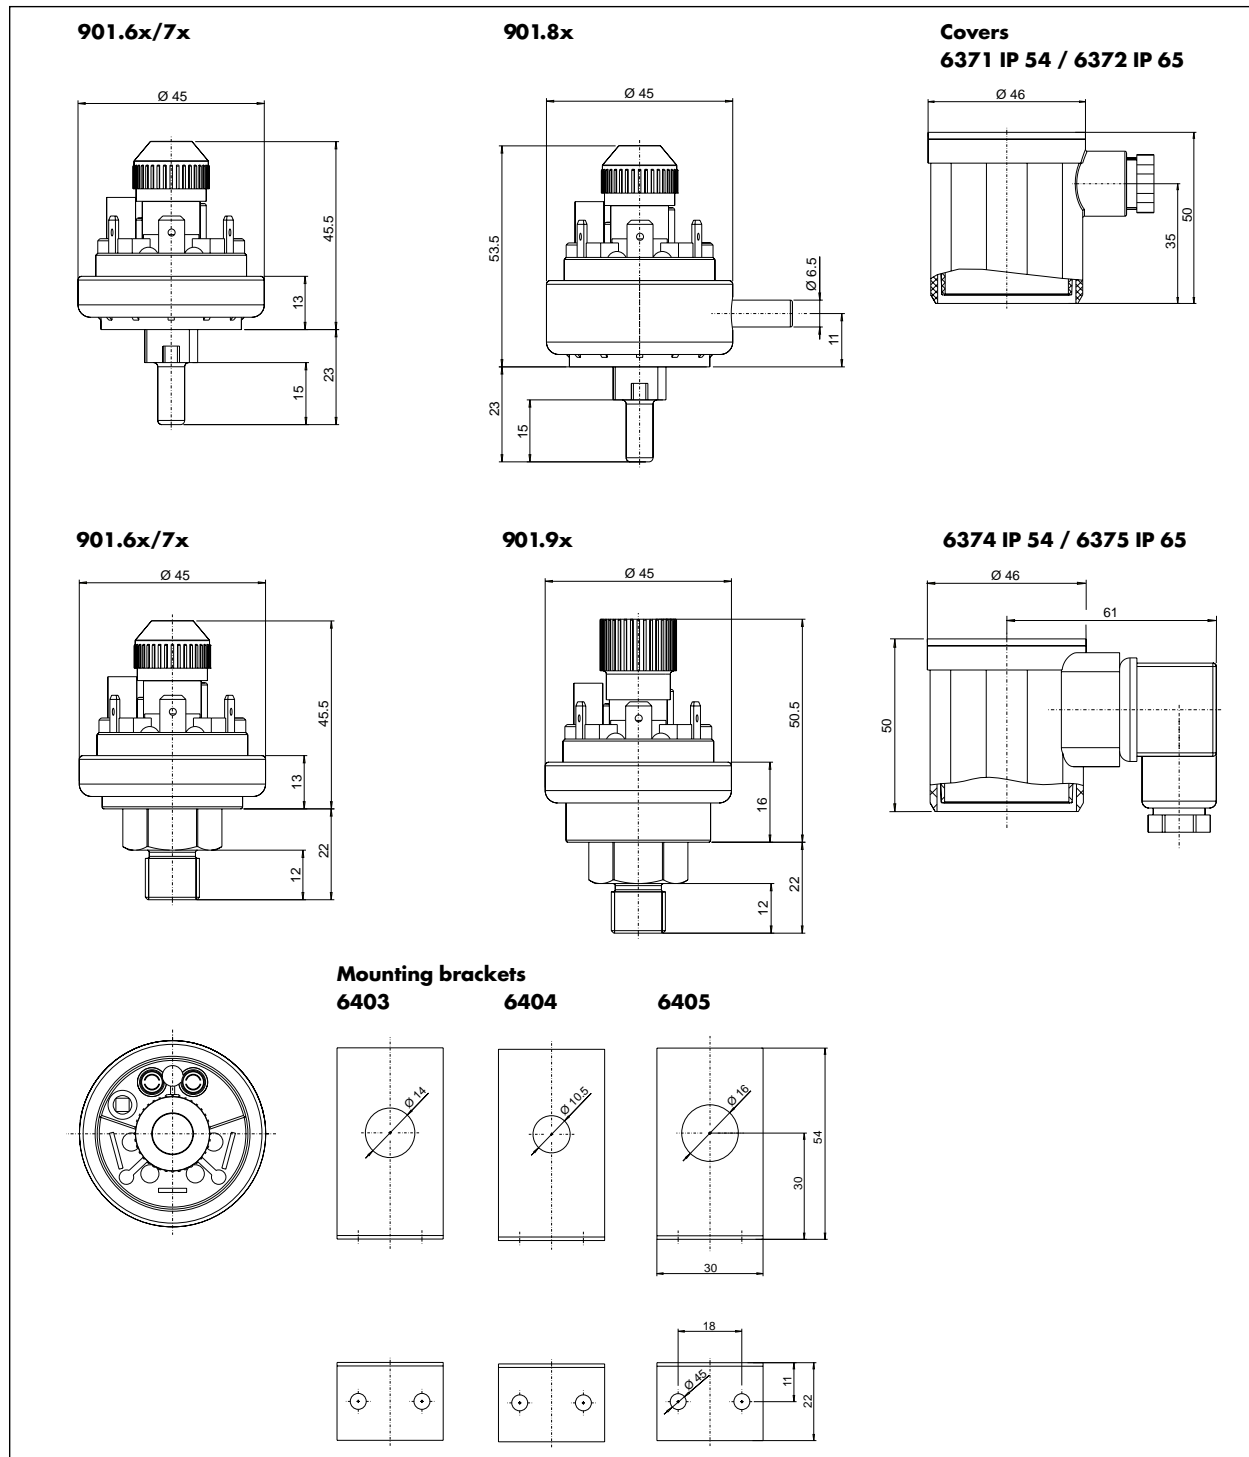

Technical data subject to change without prior notice.

901p\_ex\_data\_english\_1/09



Viton® is a registered trademark of DuPont Dow Elastomers.  
 Prescal® is a registered trademark of Beck GmbH Druckkontrolltechnik.



Beck GmbH  
 Druckkontrolltechnik  
 P.O. Box 11 31  
 D-71140 Steinenbronn  
 Phone +49 (71 57) 52 87-0  
 Fax +49 (71 57) 52 87-83  
 e-mail sales@beck-sensors.com  
 http://www.beck-sensors.com

Headquarter Switzerland:  
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
sensorsandpower@angst-pfister.com

Office Germany:  
Angst+Pfister Sensors and Power  
Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 0  
sensorsandpower.de@angst-pfister.com



## We are here for you. Addresses and Contacts.

### Sales Germany & Austria

Geometrical sensors  
Other products

Kurt Stritzelberger  
Phone +49 89 374 288 87 22  
kurt.stritzelberger@angst-pfister.com

Pressure sensors  
Other products

Gerhard Vetter  
Phone +49 89 374 288 87 26  
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei  
Phone +41 44 877 35 18  
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

### Sales International Key Accounts

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Other Countries / Product Management

Pressure Sensors  
Load Cells

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@angst-pfister.com

Gas sensors  
Gas sensor modules

Dr. Thomas Clausen  
Phone +49 89 374 288 87 24  
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 89 374 288 87 67  
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@angst-pfister.com

Linear position sensors  
Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@angst-pfister.com

Accelerometers  
Sensor elements

Christoph Kleye  
Phone +49 89 374 288 87 61  
christoph.kleye@angst-pfister.com

Drive technology  
CH Postcode 5000 – 9999 / DE

Roman Homa  
Phone +41 76 444 00 86  
roman.homa@angst-pfister.com

Drive technology  
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

Harald Thomas  
Phone +49 89 374 288 87 23  
harald.thomas@angst-pfister.com