

## The factory-set pressure switch 903 for lower switching values



### Application

Factory-set pressure switch monitoring overpressure of liquid and gaseous media. Pressure setting and switching differential are factory set by the manufacturer.

### Temperature range

Ambient temperature . 20° C to 85° C

### Diaphragm material

NBR

### Electrical rating

Standard version	max. 6 (1.5) A / 250 VAC
	max. 10 (2) A / 250 VAC
	max. 2 A / 24 VDC
Low-voltage version	max. 100 mA / 24 VAC
	max. 30 mA / 24 VDC

### Electrical connection

Tab terminal 6.3 mm x 0.8 mm in accordance with DIN 46244

### Pressure connection

Combined hose and threaded connection:  
6.5 mm and G1/4, PPS

PPS = Polyphenylensulfid

### Arrangement of contacts



### Damping

Restrictors alternatively with 0.3/0.5/0.8 mm diameter

### Protection

IP00 without protection cap  
IP54 / IP65 depending on the used protection cap

### Protection class

Protection class II is only met by using a protection cap from our accessories program.

The pressure switch without protection cap is provided for installation in equipment. The construction of the equipment and the type of installation determine the protection class.

### Warning

Read instructions before use. This regulating and control unit must be installed in compliance with the applicable regulations.

### Conformity

EU Low Voltage Directive  
EU RoHS Directive

### Overpressure


Typ	Factory-set trip pressure		Standard switching differential		Tolerance band of trip pressure	Maximum positive working pressure	Maximum negative working pressure
	between	and	lower end of range	upper end of range			
903.10	2 mbar	5 mbar	1 mbar	3 mbar	± 10 %	300 mbar	-80 mbar

### Vacuum

Typ	Factory-set trip pressure		Standard switching differential		Tolerance band of trip pressure	Maximum positive working pressure	Maximum negative working pressure
	between	and	lower end of range	upper end of range			
903.20	-2 mbar	-5 mbar	1 mbar	3 mbar	± 10 %	300 mbar	-80 mbar

# The factory-set pressure switch 903

for lower switching values

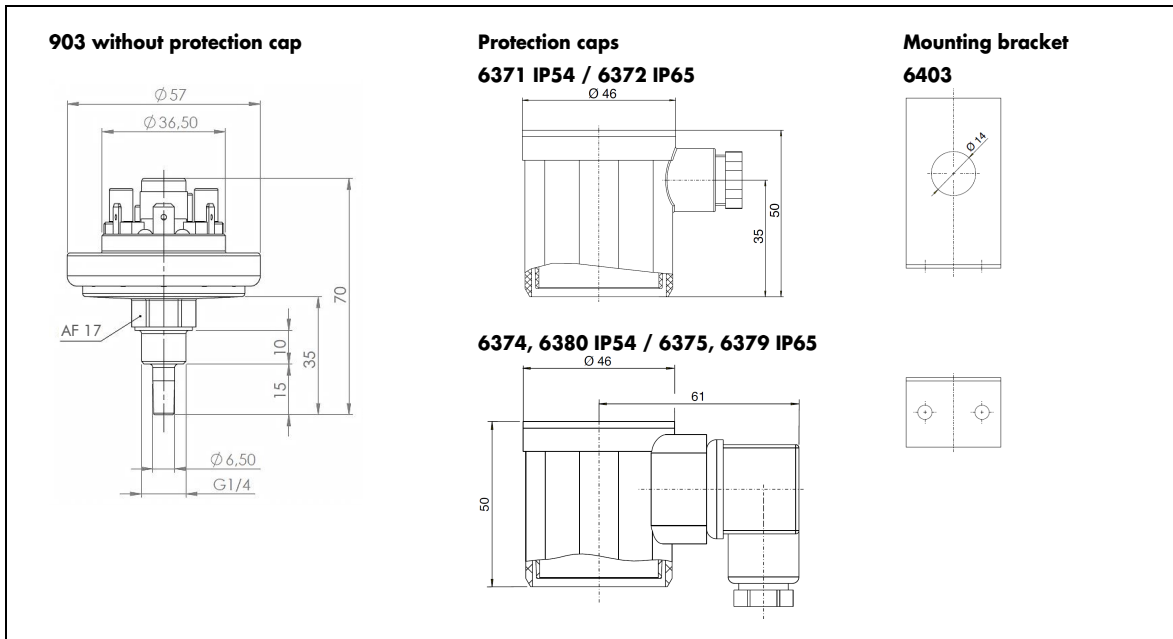

Order matrix			903.	X	0	1	1	1	Z	X
Pressure range	Overpressure	2 $\delta$ 5 mbar	1							
	Vacuum	-2 $\delta$ -5 mbar	2							
Pressure connection	Material	Plastic		0						
Tolerance band		$\pm 10\%$			1					
Pmax.		Standard				1				
Diaphragm		NBR					1			
Pressure connection		6.5 mm and G1/4 - PPS							Z	
Switch contacts	Low-voltage	Gold-plated								1
	6A / 250 VAC	AgNi								4
	10A / 250 VAC	AgNi								5

Accessories	Article-No.
Protection cap IP54 with cable conduit M16	<b>6371</b>
Protection cap IP65 with cable conduit M16	<b>6372</b>
Protection cap IP54 with connector, Shape A, to EN 175301-803, without cable	<b>6374</b>
Protection cap IP65 with connector, Shape A, to EN 175301-803, without cable	<b>6375</b>
Protection cap IP54 with connector, Shape A, to EN 175301-803, with cable	<b>6380</b>
Protection cap IP65 with connector, Shape A, to EN 175301-803, with cable	<b>6379</b>
Mounting bracket L-shaped for G1/4 connection	<b>6403</b>

Copyright© 2021 Beck Sensortechnik GmbH

Technical data subject to change without prior notice.

903\_data\_english 7121-3



Beck Sensortechnik GmbH  
 Ferdinand-Steinbeis-Str. 4  
 P.O. Box 1131  
 71144 Steinenbronn  
 Telephone: +49 (7157) 5287-0  
 Telefax: +49 (7157) 5287-83  
 E-Mail: sales@beck-sensors.com  
<http://www.beck-sensors.com>

## We are here for you. Addresses and Contacts.

---

### Headquarter Switzerland:

Angst+Pfister Sensors and Power AG  
Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
[sensorsandpower@angst-pfister.com](mailto:sensorsandpower@angst-pfister.com)

### Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 00  
[sensorsandpower.de@angst-pfister.com](mailto:sensorsandpower.de@angst-pfister.com)

---

Scan here and get an overview of personal contacts!



[sensorsandpower.angst-pfister.com](https://sensorsandpower.angst-pfister.com)

---