

PEWA100 Universal Pressure Transmitter

Features

- SS316L diaphragm structure
- High accuracy, all stainless steel structure
- Small size and light weight
- Strong anti-interference, good long-term stability
- Diversified formal structures, easy installation and use
- Wide pressure range, can measure the absolute pressure, gauge pressure and sealed gauge pressure
- Anti-vibration, shock resistance
- Zero, full span adjustable

Applications and industries

- Process control
- Aerospace
- Automobile and medical equipment
- Pipeline system

Notes:

- 1 Do not touch the diaphragm with hard objects, which may cause damage to the diaphragm.
- 2 Please read the Instruction Manual of the product carefully before installation and check the relevant information of the product.
- 3 Strictly follow the wiring method for wiring, otherwise it may cause product damage or other potential faults.
- 4 Misuse of the product may cause danger or personal injury.



Product overview

PEWA100 economic pressure transmitter adopts diffused silicon pressure sensor as pressure sensing element. Through internal ASIC, the millivolt signal of sensor is transmitted into standard current signal. PEWA100 can be directly connected with computer interface card, control instruments, intelligent meters or PLC etc. conveniently. Long-distance transmission can use current output. PEWA100 features with small size, light weight, all stainless steel sealing structure and ability to work in corrosive environments. The product is easy to install and has extremely high vibration and shock resistance. PEWA100 is widely used in process control, aviation, aerospace, automobile, medical equipment, HVAC and other fields.

Notes:

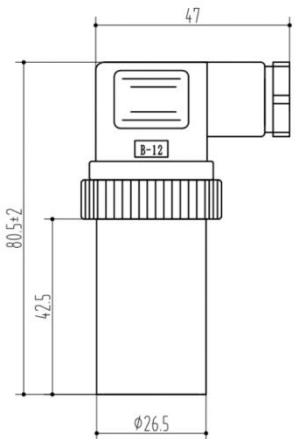
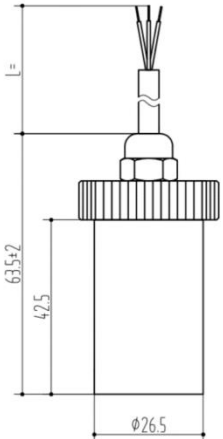
- 1 Do not misuse documentation.
- 2 The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- 3 Complete installation, operation, and maintenance information is provided in the instructions of the product.
- 4 Misuse of the product may cause danger or personal injury.

Performance parameters

Pressure range	-100kPa...0~35kPa...100MPa
Pressure reference	Gauge pressure, Absolute pressure, Sealed gauge pressure
Accuracy	0.5%FS typ., 0.7%FS max. (incl. non linearity, hysteresis and repeatability)
Total Error Band	35kPa: $\pm 2\%$ FS (0°C~60°C)(incl. non linearity, hysteresis, repeatability and temperature drift) Other ranges: $\pm 1.5\%$ FS (-20°C~85°C) (incl. non linearity, Hysteresis, Repeatability and temperature drift)

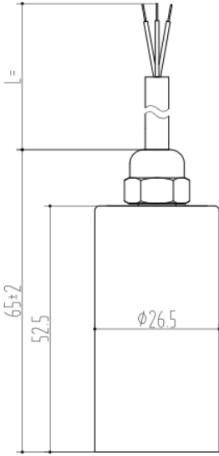
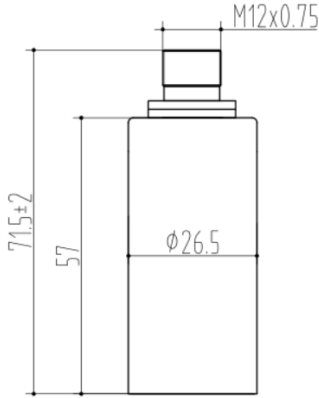
Performance parameters (cont.)	
Response time	≤1ms (Up to 90%FS)
Overpressure	Refer to Table for Pressure Range Selection
Service life	≥1×10 ⁶ pressure cycles
Ambient temperature	-20°C ~ 85°C
Medium temp.	-30°C ~ 105°C
Storage temp.	-40°C ~ 125°C
EMC	Immunity: IEC 61000-6-2, Radiation: IEC 61000-6-3
Insulation resistance	≥100MΩ/500VDC(200MΩ/250VDC)
Vibration resistance	Sine curve: 20g, 25Hz~2kHz; IEC 60068-2-6 Random: 7.5grms, 5Hz~1kHz; IEC 60068-2-64
Shock resistance	Shock: 200g/1ms; IEC 60068-2-27 Free falling body: 1m; IEC 60068-2-32
Protection grade	IP65
Surge	IEC 61000-4-5 3 level
Voltage resistance	Current output: 500V/AC 1min Voltage output: 250V/AC 1min
Static electricity	IEC 61000-4-2 4 level
Hexagon	HEX27
Ex-proof grade	Intrinsically safe explosion-proof Exia II CT6 (only for 4~20mA)
Net weight	150~180g

Output and power supply						
Code	B1	B3	B2	B7	B12	B6
Output	4~20mA	0~5V	1~5V	0~10V	1~10V	0.5~4.5V R/M
Power supply	12~30VDC	12~30VDC	12~30VDC	12~30VDC	12~30VDC	5VDC

Electrical connection & wiring mode		
Connector code	J5: DIN43650	J15: DIN43650 with cable
Dimension In mm		
Protection grade	IP65	IP65
Wiring method (2 wire current)	Pin 1: Power supply+ (Red wire) Pin 2: Current output (Green wire)	Red wire: Power supply+ Green wire: Current output
Wiring method	Pin 1: Power supply+ (Red wire)	Red wire: Power supply+

Version No.: V1.4

2

(3 wire voltage)	Pin 2: Common-ground (Green wire) Pin 3: Voltage output (Yellow wire)	Green wire: Common-ground Yellow wire: Voltage output
Connector code	J3: Cable outlet	J4: M12
Dimension In mm		
Protection grade	IP65	IP65
Wiring method (2 wire current)	Red wire: Power supply+ Green wire: Current output	Pin 1: Power supply+(Red wire) Pin 2: Current output (Green wire)
Wiring method (3 wire voltage)	Red wire: Power supply+ Green wire: Common-ground Yellow wire: Voltage output	Pin 1: Power supply+ (Red wire) Pin 2: Common-ground (Green wire) Pin 3: Voltage output (Yellow wire)

Application of damper

Applications


Cavitation, liquid hammer and pressure peak may occur in air or fluid systems with varying flow rates, such as the rapid closing of the valve or the start and stop of the pump.










Even at relatively low operating pressures, these problems may occur at the entrance and exit.










Media condition

In the liquid containing particles, nozzle clogging may occur. The vertical mounting of pressure transmitter minimizes the risk of clogging because the flow of fluid happens in initial start only, the volume of the rear of the nozzle is fixed and the nozzle has a relatively large aperture (1.2 mm).

The effect of medium viscosity on response time is small. Even if the viscosity reaches 100 CST, the response time will not exceed 4ms.



Pressure connection			
Thread code	C1: M20×1.5-6g	C2: G1/2	C3: G1/4
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm
Thread code	C4: M14×1.5	C5: NPT1/4, Z1/4	C6: R1/4, PT1/4, ZG1/4
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm
Thread code	C7: NPT1/2, Z1/2	C8: M12×1.5	C10: R1/2, PT1/2, ZG1/2
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm

Pressure connection			
Thread code	C15: G3/8	C20: M10×1	C22: M16×1.5
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm
Thread code	C23: M18×1.5	C11: 7/16-20UNF	C14: G1/8
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm
Thread code	C27: M22×1.5	C18: 1/8-27NPT	C13: R3/8, PT3/8, ZG3/8
Dimension In mm			
Recommended torque	15~25Nm	15~25Nm	15~25Nm

Note: The torque depends on all kinds of factors, such as gasket material, kitting material, thread lubrication and pressure.

Pressure range selection

Pressure range code	Pressure reference	Pressure range	Overpressure	Burst pressure	NOTES
35k	G, A	0~35kPa	300%FS	600%FS	
70k	G	0~70kPa	300%FS	600%FS	
100k	G, A	0~100kPa	200%FS	500%FS	
250k	G, A	0~250kPa	200%FS	500%FS	
400k	G, A	0~400kPa	200%FS	500%FS	
600k	G, A	0~600kPa	200%FS	500%FS	
1M	G, A, S	0~1MPa	200%FS	500%FS	
1.6M	G, S	0~1.6MPa	200%FS	500%FS	
2.5M	G, S	0~2.5MPa	200%FS	500%FS	
4M	S	0~4MPa	200%FS	400%FS	
6M	S	0~6MPa	200%FS	400%FS	
10M	S	0~10MPa	200%FS	400%FS	
16M	S	0~16MPa	200%FS	400%FS	
25M	S	0~25MPa	150%FS	400%FS	
40M	S	0~40MPa	150%FS	300%FS	
60M	S	0~60MPa	150%FS	300%FS	
100M	S	0~100MPa	150%FS	300%FS	
(-100~0)k	Omission	-100~0kPa	300kPa	600kPa	
(0~-100)k	Omission	0~-100kPa	300kPa	600kPa	
NP100k	Omission	-100~100kPa	300kPa	600kPa	

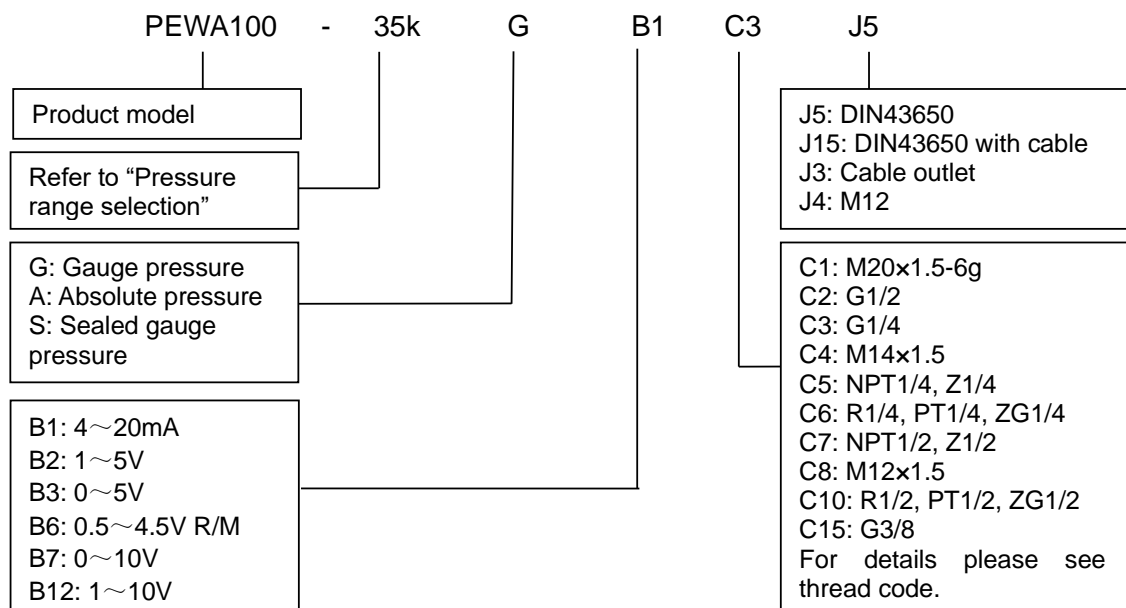
Note 1: G stands for gauge pressure, A, absolute pressure, S, sealed gauge pressure.

Accessory

Name	Appearance	Description
M4 damper		Refer to "Application of damper"
LCD12 display gauge		<ol style="list-style-type: none"> LCD display Green backlight

Accessory (cont.)		
BS-6 digital display gauge		1. Nixie tube display 2. Red backlight
Hirschmann plug made in China		Made in China
Imported Hirschmann plug		Imported
X12 circular miniconnector (set)		Thread M12×0.75

How to order



Version No.: V1.4


7

Example: PEWA100-35kGB1C3J5

Refers to product model PEWA100, pressure range 0~35kPa, pressure reference gauge pressure, output signal 4~20mA, pressure connection G1/4, electrical connector DIN43650.

Ordering tips

1. Please ensure the compatibility between the measured medium and the contacting part of the product when placing an order.
2. For the pressure range between 1~35kPa, the product can be customized.
3. For the pressure range between 25~100MPa, with the super strong pressure impact for the application on site, the product can be customized.



Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com