

CRS09A

Angular Rate Sensor

SILICON SENSING 



A new design of silicon MEMS gyro combined with high-quality discrete electronics, enabling best-in-class performance for demanding applications. Low noise and outstanding stability make this the sensor of choice for applications where a fibre-optic gyro would have been the preferred solution.


The CRS09A offers a new choice for users who have integrated the now-discontinued VSG into their products. Applications include closed-loop stabilisation, precision flight instrumentation (including high-performance AHRS) and other applications where low noise is a priority.

Temperature stability is excellent however, for the highest possible performance, both internal temperature and silicon ring frequency data are provided as additional outputs. These allow very accurate determination of the temperature characteristics of the sensor, such that a designer can apply his own temperature compensation scheme.

Key features

- Best-in-class performance
- Low noise
- High stability over temperature
- Provision for temperature compensation
- FOG-like performance
- Two rate ranges, two performance choices for each

Whatever your application, the unique and patented silicon ring technology gives advanced and stable performance over time and temperature, overcoming mount sensitivity problems associated with simple beam or tuning fork based sensors.

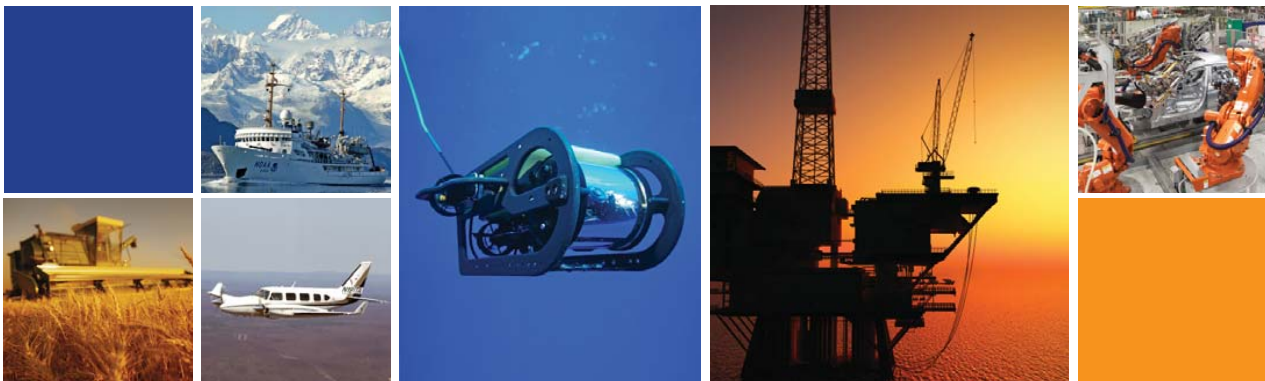

© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company


CRS09A

Angular Rate Sensor




For full technical datasheets please go to our website where the documents can be downloaded

All dimensions in millimetres

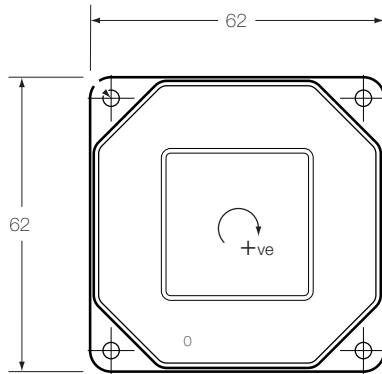

Connector: 53254-0870 (Molex)
Mating Connector: 51065-0800 (Molex)
(This connector with 500mm cable is included with each CRS09A).
Note that the Manufacturer's (Molex) identification of Pin 1 should be Ignored.

See Technical Datasheet for more information.

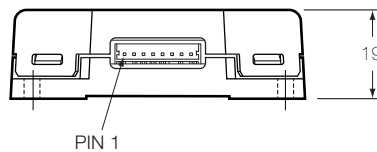

Typical Data

	CRS09A-01	CRS09A-02
	CRS09A-11	CRS09A-12
Angular Rate Range	±200°/s	±100°/s
Output	Analogue (non-ratiometric)	
Scale Factor		
Nominal	10mV/°/s	20mV/°/s
Setting tolerance (23°C)	±1%	
Variation over temperature range	< ±1%	
Non-linearity	0.1% of full scale	
Bias		
Setting tolerance (23°C)	< ±1°/s	
Variation over temperature range	< ±3°/s (CRS09-01 and CRS09-02) < ±1°/s (CRS09-11 and CRS09-12)	
Angular Random Walk	0.1°/rt hr	
Bias instability	3°/hr	
Bandwidth (typical)	55Hz	
Quiescent Noise		
3 to 30Hz	0.03°/s rms	
Environment		
Temperature	-40°C to +85°C	
Linear acceleration	tba	
Shock	tba	
Vibration	10g rms (20Hz to 2kHz, random)	
Cross-axis sensitivity	2%	
Mass	60 grams	
Electrical		
Supply voltage	+4.75V to +5.25V	
Supply current	100mA (steady state)	
Noise and ripple	< 15mV (0.5Hz to 100Hz)	
Start-up time	< 0.5s	
RoHS Compliant	Yes	

Pin Connections

1	GND
2	+5V
3	Rate Output
4	Reference
5	TMP
6	Do Not Connect
7	FRQ
8	Not Connected

Silicon Sensing Systems Limited
Cliffatford Road, Southway,
Plymouth, Devon
PL6 6DE United Kingdom

T +44 (0)1752 723330
F +44 (0)1752 723331
E sales@siliconsensing.com
W siliconsensing.com

Silicon Sensing Systems Japan Limited
1-10 Fuso-Cho,
Amagasaki,
Hyogo 6600891, Japan

T +81 (0)6 6489 5868
F +81 (0)6 6489 5919
E sssj@spp.co.jp
W siliconsensing.com

Specification subject to change without notice.

© Copyright 2017
Silicon Sensing Systems Limited
All rights reserved. Printed in England 08/17

CRS09A-00-0100-131 Rev 2
DCR No. 710013390

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Cliffatford Road, Southway, Plymouth, Devon PL6 6DE
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com