

New

# DMU30

## High Performance MEMS Inertial Measurement Unit (HPIMU)

SILICON  
SENSING®



### Key features

- Precision 6-DOF MEMS Inertial Measurement Unit
- Silicon Sensing's latest VSG3Q<sup>MAX</sup> inductive gyro and capacitive MEMS accelerometer
- Excellent Bias Instability and Random Walk  
Angular - 0.1°/hr, 0.02°/√hr Linear - 15µg, 0.05m/s/√hr
- Non-ITAR
- Compact and lightweight - 68.5 x 61.5 x 65.5H (mm), 345g
- Internal power conditioning to accept 4.75V to 36V input voltage
- RS422 interfaces
- -40°C to +85°C operating temperature range
- Sealed aluminium housing (IP67)
- RoHS compliant
- In-house manufacture from MEMS fabrication to IMU calibration
- Evaluation kit and integration resources available
- First class customer technical support
- Future developments and expansion capability, e.g. magnetometer, barometer, GPS

### Description

DMU30 is the first of a new family of High Performance MEMS IMUs (HPIMU) incorporating Silicon Sensing's tried and tested precision VSG3Q<sup>MAX</sup> high-Q inductive and VSG5 low-noise PZT resonating ring gyroscopes and capacitive accelerometers.


DMU30 is a six-degree-of-freedom inertial measurement unit providing precise 3-axis outputs of angular rate and acceleration, delta angle and velocity, and temperature, at 200Hz. It uses a unique Multi-MEMS architecture to blend the inputs from dual independent MEMS sensing elements per axis to achieve benchmark all-MEMS inertial performance across the duty cycle.

DMU30 represents a realistic alternative to established FOG/RLG based IMUs due to its exceptional bias stability and low noise characteristics, yet it is comparatively compact, lightweight and offers low cost of ownership.

Designed specifically to meet the growing demand from high-end commercial and industrial market applications for a 'tactical' grade non-ITAR IMU, DMU30 utilises Silicon Sensing's class leading MEMS inertial sensors integrated and calibrated using an in-house state-of-the-art test facility.

### Applications

- Hydrographic surveying
- Airborne survey and mapping
- INS (Inertial Navigation Systems)
- AHRS (Attitude and Heading Reference System)
- GPS drop-out aiding
- Maritime guidance and control
- GNSS (Global Navigation Satellite System)
- Autonomous vehicle control and ROVs
- Machine control
- MEMS alternative to FOG/RLG IMUs

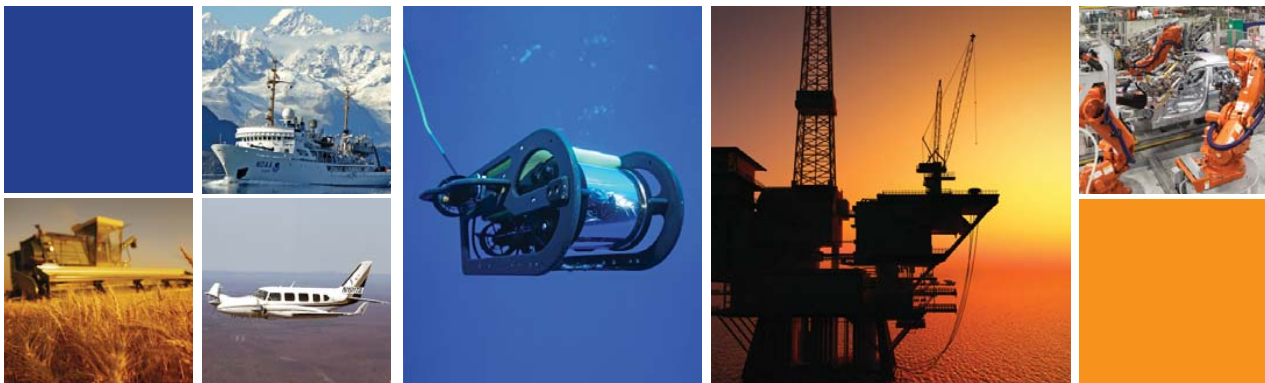


© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company

# DMU30

High Performance MEMS  
Inertial Measurement Unit (HPIMU)



## DMU30

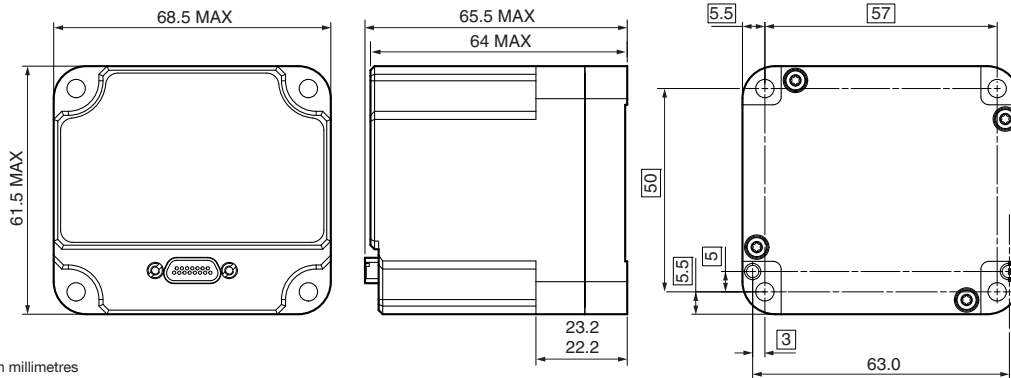

All dimensions in millimetres

### Typical Data

Parameter	Specification
<b>Gyroscope Properties</b>	
Dynamic range	$\pm 490^\circ/\text{s}$
Scale factor over temp ( $\pm 200^\circ/\text{s}$ )	$\pm 250\text{ppm}$
SF non-linearity ( $\pm 200^\circ/\text{s}$ )	$\pm 100\text{ppm}$
Bias instability	$< 0.1^\circ/\text{h}$
Random walk	$< 0.02^\circ/\sqrt{\text{h}}$
Bias over temp	$\pm 15^\circ/\text{h}$
Noise (rms to 100Hz)	$0.05^\circ/\text{s}$
<b>Accelerometer Properties</b>	
Dynamic range	$\pm 10\text{g}$
Scale factor over temp ( $\pm 1\text{g}$ )	$\pm 250\text{ppm}$
SF non-linearity ( $\pm 10\text{g}$ )	$\pm 1000\text{ppm}$
Bias instability	$< 0.015\text{mg}$
Random walk	$< 0.05\text{m/s}/\sqrt{\text{h}}$
Bias over temp	$\pm 1.5\text{mg}$
Noise (rms to 100Hz)	$0.90\text{mg}$
<b>Cross Axis Sensitivity</b>	
Over temperature	$\pm 0.20\%$
<b>IMU Temperature Sensor Properties</b>	
Range	$-45$ to $100^\circ\text{C}$
Accuracy at temperature	$\pm 3.0^\circ\text{C}$
<b>IMU Properties</b>	
Operating temperature	$-40$ to $85^\circ\text{C}$
Start-up-time (full performance)	$< 1.0\text{s}$ ( $< 20\text{s}$ )
Power	$< 3\text{W}$
Supply voltage	$4.75$ to $36\text{V}$
Mass	$345\text{g}$



DMU30 EVK Evaluation Kit  
(P/N DMU30-00-0500)

Specification subject to change without notice.

© Copyright 2017  
Silicon Sensing Systems Limited  
All rights reserved. Printed in England 06/17

DMU30-00-0100-131 Rev 5  
DCR No. 710013007

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Clifford Road, Southway, Plymouth, Devon PL6 6DE  
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

Headquarter Switzerland:  
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
sensorsandpower@angst-pfister.com

Office Germany:  
Angst+Pfister Sensors and Power  
Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 0  
sensorsandpower.de@angst-pfister.com



## We are here for you. Addresses and Contacts.

### Sales Germany & Austria

Geometrical sensors  
Other products

Kurt Stritzelberger  
Phone +49 89 374 288 87 22  
kurt.stritzelberger@angst-pfister.com

Pressure sensors  
Other products

Gerhard Vetter  
Phone +49 89 374 288 87 26  
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei  
Phone +41 44 877 35 18  
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

### Sales International Key Accounts

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Other Countries / Product Management

Pressure Sensors  
Load Cells

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@angst-pfister.com

Gas sensors  
Gas sensor modules

Dr. Thomas Clausen  
Phone +49 89 374 288 87 24  
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 89 374 288 87 67  
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@angst-pfister.com

Linear position sensors  
Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@angst-pfister.com

Accelerometers  
Sensor elements

Christoph Kleye  
Phone +49 89 374 288 87 61  
christoph.kleye@angst-pfister.com

Drive technology  
CH Postcode 5000 – 9999 / DE

Roman Homa  
Phone +41 76 444 00 86  
roman.homa@angst-pfister.com

Drive technology  
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

Harald Thomas  
Phone +49 89 374 288 87 23  
harald.thomas@angst-pfister.com