



PROTEK POWER

96-135 WATT ITE POWER SUPPLIES

DESCRIPTION

The PUP121/PUP136 series of AC/DC switching power supplies are for 96-135 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an IEC320/C14, IEC320/C6 inlet to mate with interchangeable cord for world-wide use. All models meet EN55022, EN55024 and FCC class B emission limits and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.21w
- Meet efficiency level VI
- Meet energy star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	1.8 A (rms) for 115 VAC 0.9 A (rms) for 230 VAC
Touch current:	250 μ A max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	See rating chart.
Overvoltage protection:	Set at 110-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 μ s after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Operating humidity:	20% to 80% non-condensing
Storage humidity:	10% to 90% non-condensing

PUP121/PUP136 SERIES



CE

RoHS

VI

SAFETY STANDARD APPROVALS



UL 60950 3 rd, CSA C22.2 NO. 60950 3 rd
File No. E190414



TÜV EN 60950-1

GENERAL SPECIFICATIONS

Hold-up time:	10 ms minimum at 115 VAC
Turn on delay time	3 s maximum at 100 VAC
Power factor:	0.9 typical at 115 VAC
Efficiency:	89% typical at full load
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	70 A @ 115 VAC or 140 A @ 230 VAC, at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to output
MTBF:	500,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332

EMC Performance

EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and >95% reduction for 10 ms

UNIVERSAL INPUT

PUP121/PUP136 ITE SERIES


OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output						Average Active Efficiency (typical) @115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽¹⁾	Max. Output Power	
PUP121-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 /89%
PUP121S-12	12 V	0 A	8.00 A	±5%	350 mV	96 W	89 /89%
PUP121-13-2	19 V	0 A	6.32 A	±5%	350 mV	120 W	91 /91%
PUP121S-13-2	19 V	0 A	6.32 A	±5%	350 mV	120 W	91 /91%
PUP121-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	90 /90%
PUP121S-14	24 V	0 A	5.00 A	±5%	350 mV	120 W	90 /90%
PUP121-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	91 /90%
PUP121S-18	48 V	0 A	2.50 A	±5%	350 mV	120 W	91 /90%
PUP121-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	92 /92%
PUP121S-19	54 V	0 A	2.22 A	±5%	350 mV	120 W	92 /92%
PUP136-13-2	19 V	0 A	7.10 A	±5%	350 mV	135 W	91 /91%
PUP136S-13-2	19 V	0 A	7.10 A	±5%	350 mV	135 W	91 /91%

NOTES:

- PUP121/PUP136 models are equipped with IEC320/C14 inlet, and PUP121S/PUP136S models with IEC320/C6 inlet.
- Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

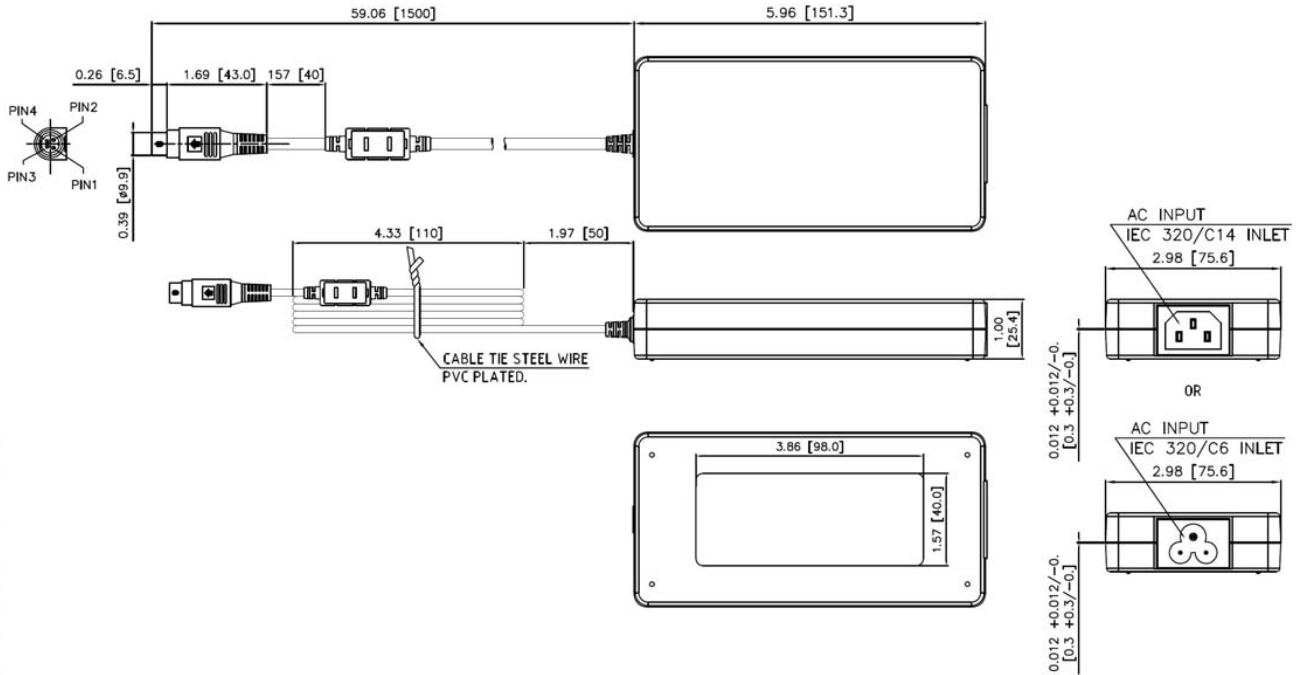

NOTES:

- Dimensions shown in inches [mm]
- Tolerance 0.02 [0.5] maximum
- Weight: 450 grams (0.99 lbs.) approx.

PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return & AC Ground	V1 Return & AC Ground	V1 Return & AC Ground

Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com