



MGJ2 Series

5.2kVDC Isolated 2W Gate Drive DC-DC Converters

FEATURES

- Optimised bipolar output voltages for IGBT/ Mosfet gate drives
- Reinforced insulation to UL60950 recognised³
- ANSI/AAMI ES60601-1, 1 MOPP/2 MOOP's recognised⁴
- 5.2kVDC isolation test voltage 'Hi Pot Test'
- Ultra low coupling capacitance
- SIP package style
- 5V, 12V, 15V & 24V inputs
- +15V/-3V, +15V/-5V, +15V/-8.7V, +15V/-15V, +17V/-9V, +18V/-2.5V, +20V/-3.5V & +20V/-5V outputs
- Operation to 100°C
- Characterised CMTI >200kV/μS
- Continuous barrier withstand voltage 2.4kVD
- Characterised partial discharge performance

PRODUCT OVERVIEW

The MGJ2 series of DC-DC converters is ideal for powering 'high side' and 'low side' gate drive circuits for IGBTs and Mosfets in bridge circuits. A choice of asymmetric output voltages allows optimum drive levels for best system efficiency and EMI. The MGJ2 series is characterised for high isolation and dv/dt requirements commonly seen in bridge circuits used in motor drives and inverters, while the MGJ2 industrial grade temperature rating and construction gives long service life and reliability.

SELECTION GUIDE

Order Code	Nominal Input Voltage	Output Voltage 1	Output Voltage 2	Output Current 1	Output Current 2	Input Current at Rated Load	Load Regulation (Typ)	Load Regulation (Max)	Ripple & Noise (Typ) ²	Ripple & Noise (Max) ²	Efficiency (Min)	Efficiency (Typ)	Isolation Capacitance (Typ)	MTTF	
														MIL. kWhrs	Tel. kWhrs
MGJ2D051505SC	5	15	-5	80	40	360	5.7	7	30	50	71	76	3	2095	
MGJ2D051509SC	5	15	-8.7	80	40	390	6	7	30	50	73	77.5	3	1902	
MGJ2D051515SC	5	15	-15	67	67	492	7	8.5	20	35	74	78	3	2629	
MGJ2D051802SC	5	18	-2.5	80	80	410	9	12	20	50	70	75	3	1376	31920
MGJ2D052003SC	5	20	-3.5	80	80	470	8	11	20	50	72	77	3	1253	32603
MGJ2D052005SC	5	20	-5	80	40	440	6.2	8	30	50	74	78.5	3	1655	
MGJ2D121503SC ³	12	15	-3	95	95	170	8	10	25	50	76	80	3		
MGJ2D121505SC	12	15	-5	80	40	150	4.7	6	30	50	76	80	3	2339	
MGJ2D121509SC	12	15	-8.7	80	40	155	5.3	7.5	30	50	76	80	3	2296	
MGJ2D121515SC	12	15	-15	67	67	203	6.0	7	24	40	78	82	3	2707	
MGJ2D121802SC	12	18	-2.5	80	80	170	8	11	20	50	74	80	3	1553	36519
MGJ2D122003SC	12	20	-3.5	80	80	190	7	10	20	50	77	82	3	1371	36431
MGJ2D122005SC	12	20	-5	80	40	195	5.5	8	30	45	78	82	3	1799	
MGJ2D151505SC	15	15	-5	80	40	120	5	7	30	50	75	80	3	2374	
MGJ2D151509SC	15	15	-8.7	80	40	130	5	7	30	50	76	80	3	2736	
MGJ2D151515SC	15	15	-15	67	67	167	5.5	7	23	35	75	79	3	2100	
MGJ2D151802SC	15	18	-2.5	80	80	130	8	11	20	50	73	79	3	1392	32908
MGJ2D152003SC	15	20	-3.5	80	80	150	7	10	20	50	76	81	3	2000	80000
MGJ2D152005SC	15	20	-5	80	40	145	6	8	30	50	78	81	3	1864	
MGJ2D241505SC	24	15	-5	80	40	75	4.6	7	30	50	75	80.5	4	2194	
MGJ2D241509SC	24	15	-8.7	80	40	80	4.8	7	30	50	77	82	4	2275	
MGJ2D241709SC	24	17	-9V	80	80	105	6	8	30	50	78	83	4	1050	47000
MGJ2D241802SC	24	18	-2.5	80	80	90	8	11	20	50	73	80	4	1461	32315
MGJ2D242003SC	24	20	-3.5	80	80	90	7	10	20	50	76	82	4	1333	32482
MGJ2D242005SC	24	20	-5	80	40	90	6	8	30	50	78	82	4	1725	

INPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Voltage range	Continuous operation, 5V input types	4.5	5	5.5	V
	Continuous operation, 12V input types	10.8	12	13.2	
	Continuous operation, 15V input types	13.5	15	16.5	
	Continuous operation, 24V input types	21.6	24	26.4	
Input reflected ripple	5V input types		40		mA
	12V & 15V input types		20		
	24V input types		15		

OUTPUT CHARACTERISTICS

Parameter	Conditions	Min.	Typ.	Max.	Units
Rated Power	T _A =-40°C to 100°C			2	W
Voltage Set Point Accuracy	See tolerance envelopes				
Line regulation	High V _{IN} to low V _{IN}		1.0	1.2	%/%

1. Calculated using MIL-HDBK-217 FN2 and Telecordia SR-332 calculation model with nominal input voltage at full load.
 2. See ripple & noise test method.
 3. UL60950-1 recognition is currently pending for the MGJ2D121503SC variant as the product is in development and data included within this datasheet is preliminary.
 4. ANSI/AAMI ES60601-1 recognition is currently pending for the MGJ2D241709SC, MGJ2Dxx1515SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants.

All specifications typical at T_A=25°C, nominal input voltage and rated output current unless otherwise specified.



www.murata-ps.com/support

ISOLATION CHARACTERISTICS						
Parameter	Conditions	Min.	Typ.	Max.	Units	
Isolation test voltage	Production tested for 1 second	5200			VDC	
	Qualification tested for 1 minute	5200				
Resistance	Viso= 500VDC		1		GΩ	
Continuous barrier withstand voltage	Non-safety barrier application			2400	V	
Safety standard	UL60950-1	MGJ2Dxx1515SC types	Basic/supplementary	200	Vrms	
		All others ¹	Reinforced	150		
			Basic/supplementary	300		
	ANSI/AAMI ES60601-1	MGJ2Dxx1515SC types	1 MOOP			200
			1 MOOP			300
		All others ²	2 MOOP/1 MOPP			200

GENERAL CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Switching frequency	All other types		45		kHz
	MGJ2Dxx1802MC types		50		

TEMPERATURE CHARACTERISTICS					
Parameter	Conditions	Min.	Typ.	Max.	Units
Specification	All output types (see safety approval section for limitations)			100	°C
Storage				125	
Case Temperature above ambient	5V input types		24		
	All other input types		20		
Cooling	Free air convection				

ABSOLUTE MAXIMUM RATINGS	
Short-circuit protection	Continuous
Lead temperature 1mm from case for 10 seconds	260°C
Input voltage V_{in} , MGJ2D05xxxxSC	5.5V
Wave Solder	Wave Solder profile not to exceed the profile recommended in IEC 61760-1 Section 6.1.3. Please refer to application notes for further information.
Input voltage V_{in} , MGJ2D12xxxxSC	13.2V
Input voltage V_{in} , MGJ2D15xxxxSC	16.5V
Input voltage V_{in} , MGJ2D24xxxxSC	26.4V

1. UL60950-1 recognition is currently pending for the MGJ2D121503SC variant.

2. ANSI/AAMI ES60601-1 recognition is currently pending for the MGJ2D241709SC, MGJ2Dxx1515SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants.

TECHNICAL NOTES

ISOLATION VOLTAGE

'Hi Pot Test', 'Flash Tested', 'Withstand Voltage', 'Proof Voltage', 'Dielectric Withstand Voltage' & 'Isolation Test Voltage' are all terms that relate to the same thing, a test voltage, applied for a specified time, across a component designed to provide electrical isolation, to verify the integrity of that isolation.

Murata Power Solutions MGJ2 series of DC-DC converters are all 100% production tested at 5.2kVDC for 1 second and have been qualification tested at 5.2kVDC for 1 minute.

The MGJ2 series is recognised by Underwriters Laboratory, please see safety approval section for more information. When the insulation in the MGJ2 series is not used as a safety barrier, i.e. provides functional isolation only, continuous or switched voltages across the barrier up to 2.4kV are sustainable. This is established by measuring the partial discharge inception voltage in accordance with IEC 60270. Please contact Murata for further information.

REPEATED HIGH-VOLTAGE ISOLATION TESTING

It is well known that repeated high-voltage isolation testing of a barrier component can actually degrade isolation capability, to a lesser or greater degree depending on materials, construction and environment. We therefore strongly advise against repeated high voltage isolation testing, but if it is absolutely required, that the voltage be reduced by 20% from specified test voltage.

SAFETY APPROVAL

MGJ2Dxx1515SC

ANSI/AAMI ES60601-1

The MGJ2Dxx1515SC variants are pending recognition by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based upon a working voltage of 200 Vrms max and 280 Vpk max., between Primary and Secondary and between Primary and its Enclosure, in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File Number E202895 applies.

UL60950

The MGJ2Dxx1515SC variants have been recognised by Underwriters Laboratory (UL) to UL60950 for basic/supplementary insulation to a working voltage of 200Vrms in a maximum ambient temperature of 85°C and/or case temperature limit of 130°C (case temperature measured on the face opposite the pins).

File number E151252 applies.

Creepage and clearance 2mm

Working altitude 4000m

Fusing

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

MGJ2D051515SC: 2A

MGJ2D121515SC: 750mA

MGJ2D151515SC: 750mA

All fuses should be UL recognised and rated to 125V.

All other variants

ANSI/AAMI ES60601-1

The MGJ2 series has been recognised by Underwriters Laboratory (UL) to ANSI/AAMI ES60601-1 and provides 1 MOOP (Means Of Operator Protection) based on a working voltage of 300Vrms or 2 MOOP based upon a working voltage of 200 Vrms, and 1 MOPP (Mean Of Patient Protection) based on a working voltage of 200Vrms., between Primary and Secondary. The MGJ2D241709SC, MGJ2Dxx1802SC, MGJ2D121503SC and MGJ2Dxx2003SC variants are currently pending recognition.

File number E202895 applies.

UL60950

The MGJ2 series is recognised by Underwriters Laboratory (UL) to UL60950 for reinforced insulation to a working voltage of 150Vrms and for basic/supplementary insulation to a working voltage of 300Vrms. The MGJ2D121503SC variant is currently pending recognition.

File number E151252 applies.

Over voltage category	OVC I	OVC II
Working voltage	150Vrms	300Vrms
Working altitude	2000m	2000m
Creepage & clearance	2mm	2mm

Fusing

The MGJ2 Series of converters are not internally fused so to meet the requirements of UL an anti-surge input line fuse should always be used with ratings as defined below.

MGJ2D05xxxxSC: 1.25A

MGJ2D12xxxxSC: 750mA

MGJ2D15xxxxSC: 750mA

MGJ2D24xxxxSC: 750mA

All fuses should be UL recognised and rated to 125V.

www.murata-ps.com/support

KDC_MGJ2_I01 Page 3 of 12

RoHS COMPLIANCE INFORMATION



This series is compatible with RoHS soldering systems with a peak wave solder temperature of 260°C for 10 seconds. Please refer to [application notes](#) for further information. The pin termination finish on this product series is Tin Plate, Hot Dipped over Matte Tin with Nickel Preplate. The series is backward compatible with Sn/Pb soldering systems. For further information, please visit www.murata-ps.com/rohs


ENVIRONMENTAL VALIDATION TESTING

The following tests have been conducted on this product series, please contact Murata if further information about the tests is required.

Test	Standard	Condition
Temperature cycling	MIL-STD 883 1010, Condition B	10 cycles between two chambers set to achieve -55°C and +125°C. The dwell time shall not be less than 10min.
Humidity bias	JEDEC STD 22-A101	85°C ± 2°C, 85% ± 5% R.H. for >1000 hours.
Storage life	JEDEC JESD22-A103, Condition A	125°C +10/-0°C for ≥1000 hours.
Vibration	MIL STD 883 Method 2007, Condition A	1.5mm pk-pk / 20g pk min, 20-2000Hz, 4 sweeps in each of 3 mutually perpendicular axes at 3 oct/min.
Shock	MIL STD 883 method 2002, Condition A	500g 1.0ms half sine, 5 shocks in each direction of 3 mutually perpendicular axes.
ESD	JESD22-A114	HBM Testing Standard at 3 stress levels; 2.0kV, 4.0kV and 8.0kV.
Bump	IEC Class 4M5 of IEC 60068-2-27	Shock Spectrum Type II, 6ms duration, 250m/s ² 500 bumps in 6 directions.
Solderability	IPC/ECA J-STD-002, Test A1	For lead free solderability the parts are conditioned in a steam ager for 8 hours ± 15 min. at a temperature of 93±3°C. Dipped in solder at 255°C ±5°C for 5 +0/-0.5 seconds. For leaded solderability the parts are conditioned in a steam ager for 8 hours ±15 min. at a temperature of 93±3°C. Dipped in solder at 245°C ±5°C for 5 +0/-0.5 seconds
Solder heat	JEDEC JESD22-B106	The test sample is subjected to a molten solder bath at 260 ±5°C for 10 seconds (96SC tin/silver/copper).
Solder heat (hand)	MIL-STD 202 Method 210, Condition A	The soldering iron is heated to 350°C ± 10°C and applied to the terminations for a duration of 4 to 5 seconds.
Solvent cleaning	Resistance to cleaning agents.	Solvent – Novec 71IPA & Topklean EL-20A. Pulsed ultrasonic immersion 45°C- 65°C
Solvent Resistance	MIL-STD 883 Method 2015	Separate samples subjected to solvent A, solvent B and solvent D
Lead Integrity (Adhesion)	MIL-STD 883 Method 2025	Leads are bent through 90° until a fracture occurs.
Lead Integrity (Fatigue)	MIL-STD 883 Method 2004, condition B ₂	The leads are bent to an angle of 15°. Each lead is subjected to 3 cycles.
Lead Integrity (Tension/Pull)	MIL-STD 883 Method 2004, Condition A ₁	Pull of 0.227kg applied for 30 seconds. The force is then increased until the pins snap.

PART NUMBER STRUCTURE

MGJ 2 D XX XXXX S C -RXX

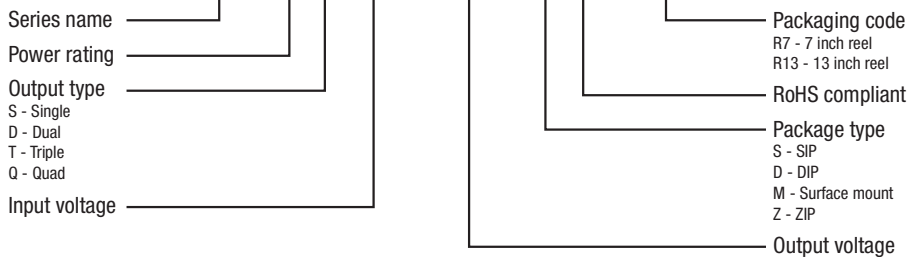

www.murata-ps.com/support


CHARACTERISATION TEST METHODS

Ripple & Noise Characterisation Method

Ripple and noise measurements are performed with the following test configuration.

C1	1 μ F X7R multilayer ceramic capacitor, voltage rating to be a minimum of 3 times the output voltage of the DC-DC converter
C2	10 μ F tantalum capacitor, voltage rating to be a minimum of 1.5 times the output voltage of the DC-DC converter with an ESR of less than 100m Ω at 100 kHz
C3	100nF multilayer ceramic capacitor, general purpose
R1	450 Ω resistor, carbon film, \pm 1% tolerance
R2	50 Ω BNC termination
T1	3T of the coax cable through a ferrite toroid
RLOAD	Resistive load to the maximum power rating of the DC-DC converter. Connections should be made via twisted wires
Measured values are multiplied by 10 to obtain the specified values.	

Differential Mode Noise Test Schematic

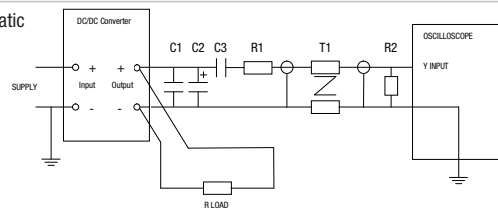

APPLICATION NOTES

Minimum load

The minimum load to meet datasheet specification is 10% of the full rated load across the specified input voltage range. Lower than 10% minimum loading will result in an increase in output voltage, which may rise to typically 1.25 times the specified output voltage if the output load falls to less than 5%.

Gate Drive Applications Advisory Note


For general guidance for product usage in gate drive applications please refer to "[gate drive application notes](#)".

Capacitive loading and start up





Typical start up times for this series, with a typical input voltage rise time of 2.2 μ s and output capacitance of 10 μ F, are shown in the table below. The product series will start into capacitance ranging from 47 μ F up to 220 μ F with increased start times.

	Start-up time ms		Start-up time ms
MGJ2D051505SC	3.3	MGJ2D151505SC	2.5
MGJ2D051509SC	4.5	MGJ2D151509SC	3
MGJ2D051515SC	20.8	MGJ2D151515SC	10.5
MGJ2D051802SC	4	MGJ2D151802SC	3
MGJ2D052003SC	5	MGJ2D152003SC	5
MGJ2D052005SC	5.4	MGJ2D152005SC	4.5
MGJ2D121503SC	3	MGJ2D241505SC	2.7
MGJ2D121505SC	3.2	MGJ2D241509SC	3
MGJ2D121509SC	4	MGJ2D241709SC	4
MGJ2D121515SC	14.5	MGJ2D241802SC	3
MGJ2D121802SC	5	MGJ2D242003SC	4
MGJ2D122003SC	5	MGJ2D242005SC	4.2
MGJ2D122005SC	5.5		

Typical Start-Up Wave Form

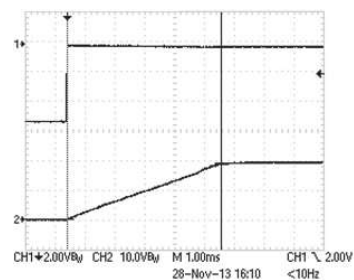


EFFICIENCY VS LOAD

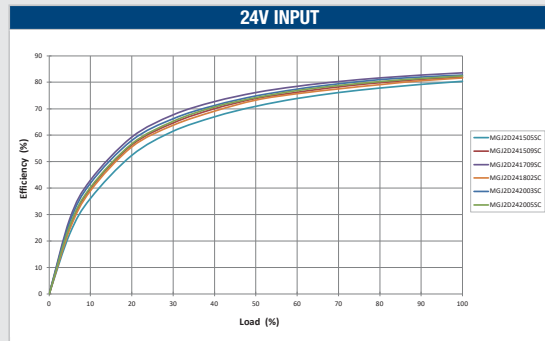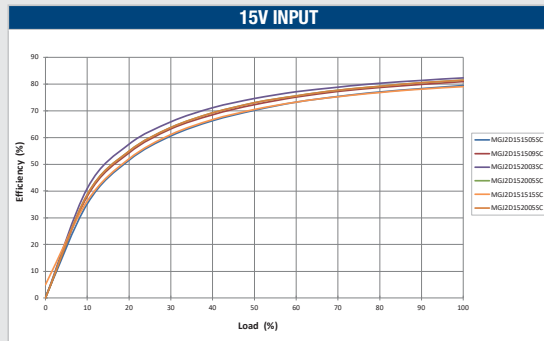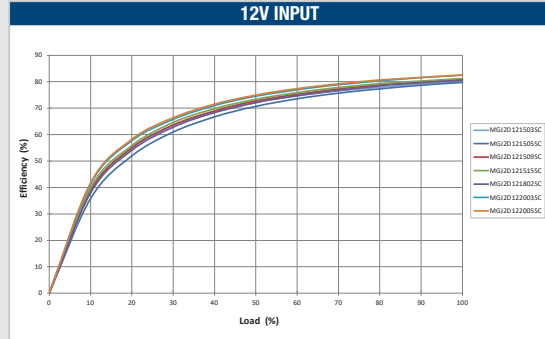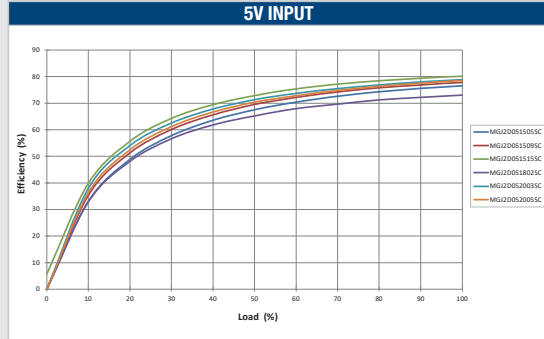


TEMPERATURE DERATING GRAPHS


121503, 051515, 121515, 151515, 051802 & 052003



051505, 121802, 151802, 241802, 052005, 122003, 152003 & 242003









All other variants

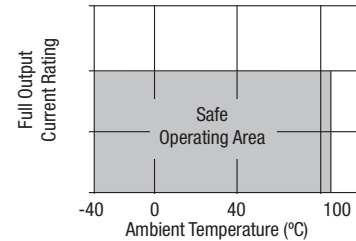

www.murata-ps.com/support







POSITIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES

The voltage tolerance envelopes show typical load regulation characteristics for this product series. The tolerance envelope is the maximum output voltage variation due to changes in output loading and set point accuracy.

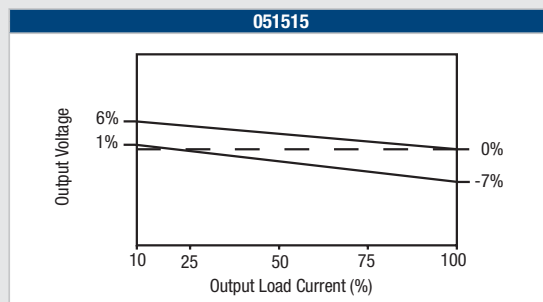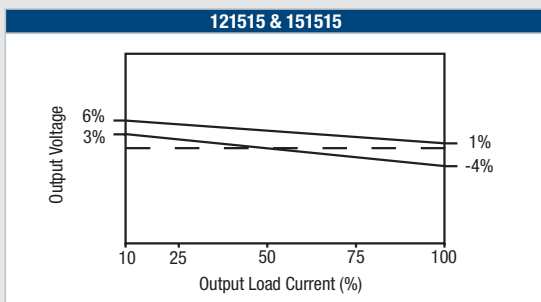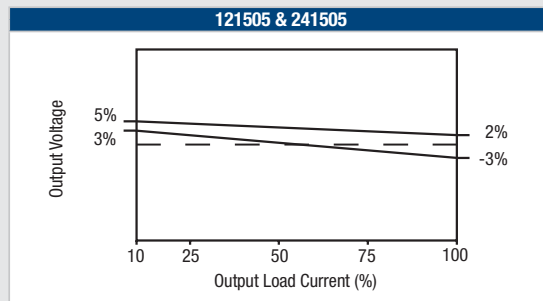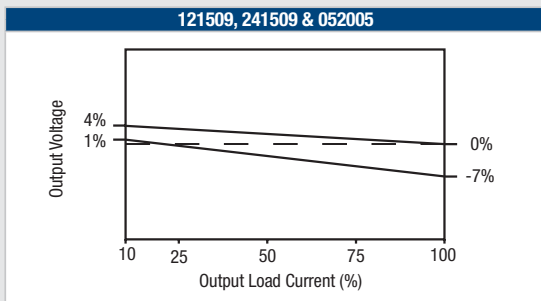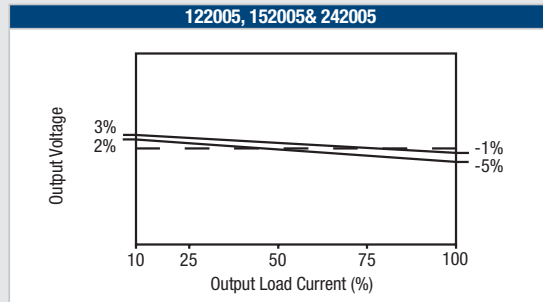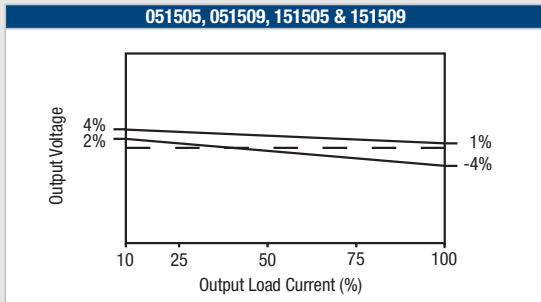







www.murata-ps.com/support

POSITIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES CONTINUED

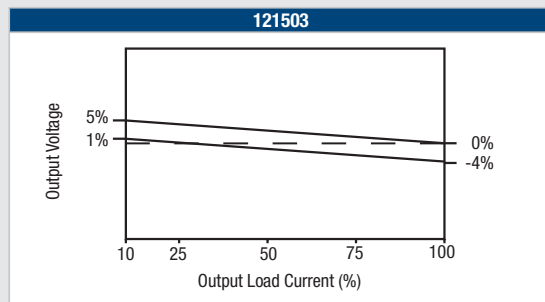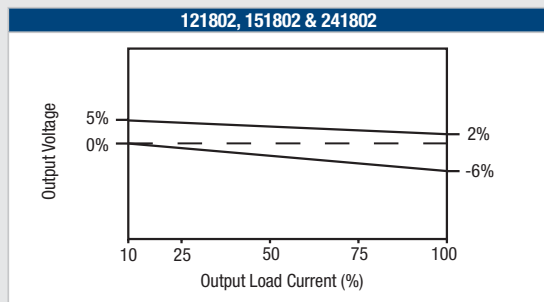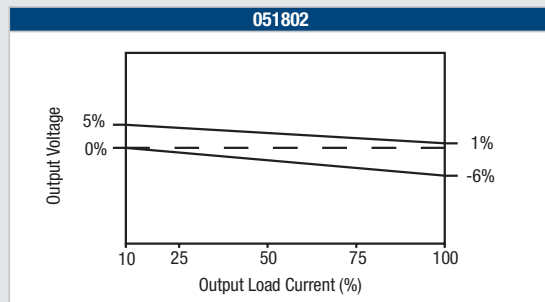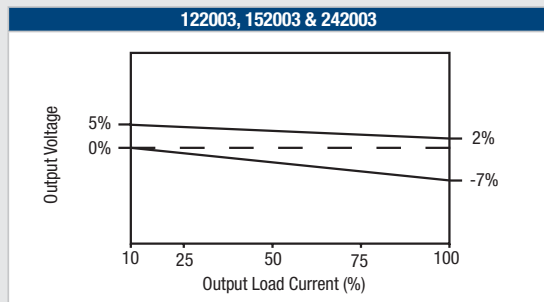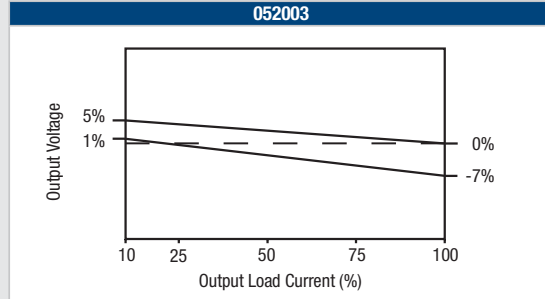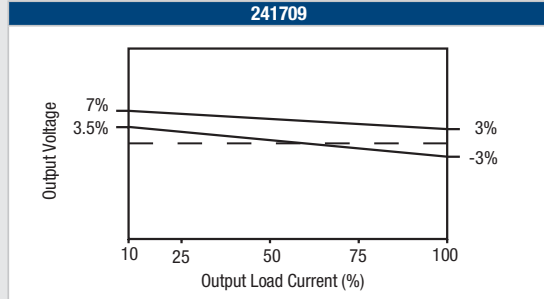








www.murata-ps.com/support

NEGATIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES

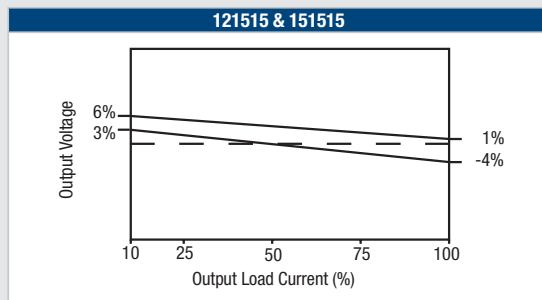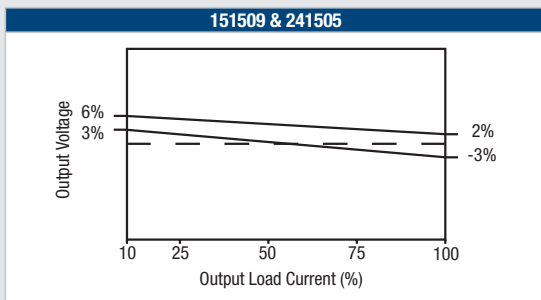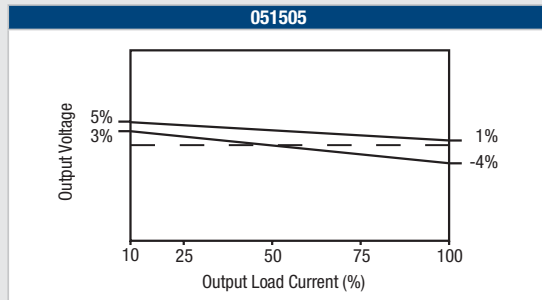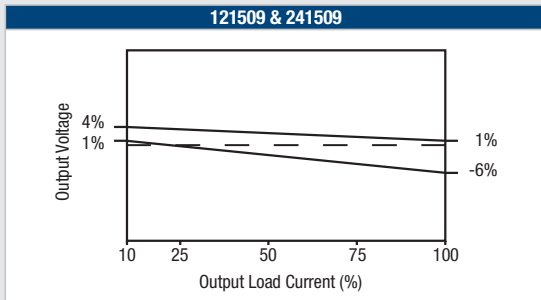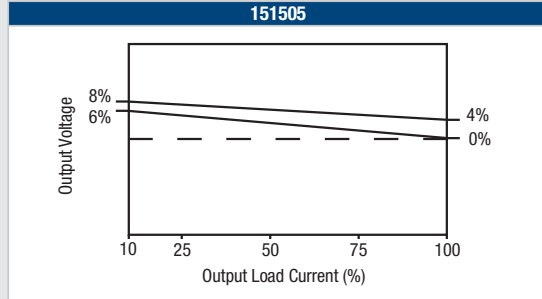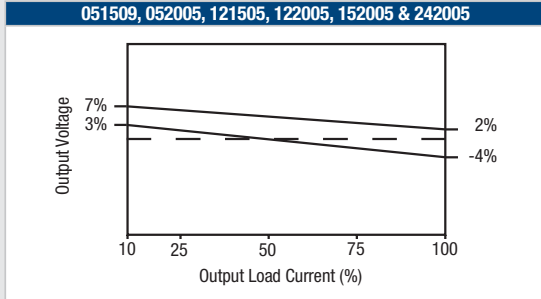

www.murata-ps.com/support


NEGATIVE OUTPUT VOLTAGE TOLERANCE ENVELOPES CONTINUED

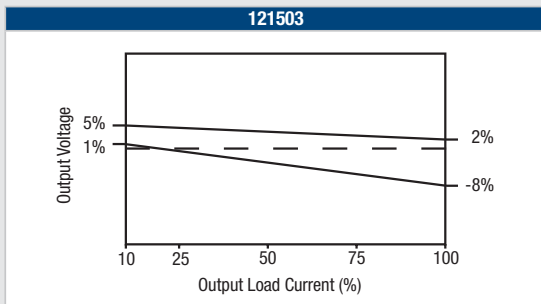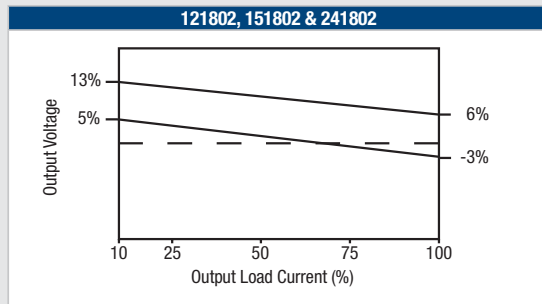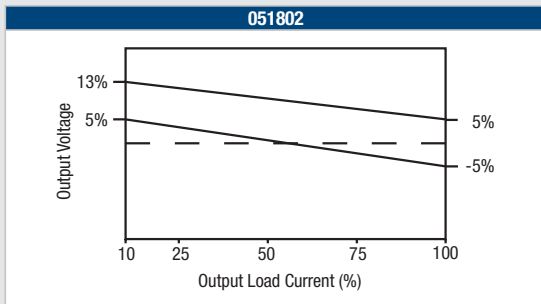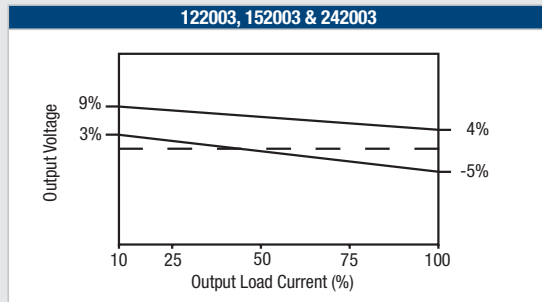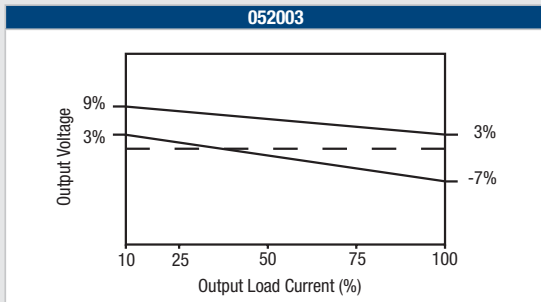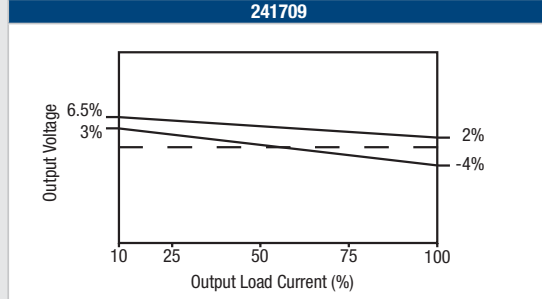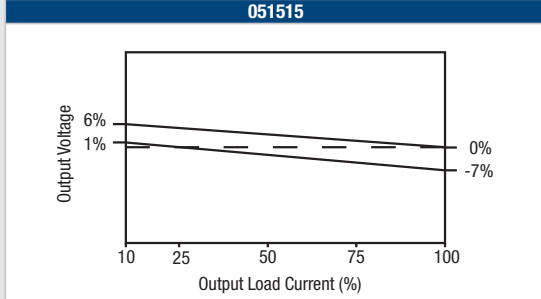

www.murata-ps.com/support

PACKAGE SPECIFICATIONS

MECHANICAL DIMENSIONS

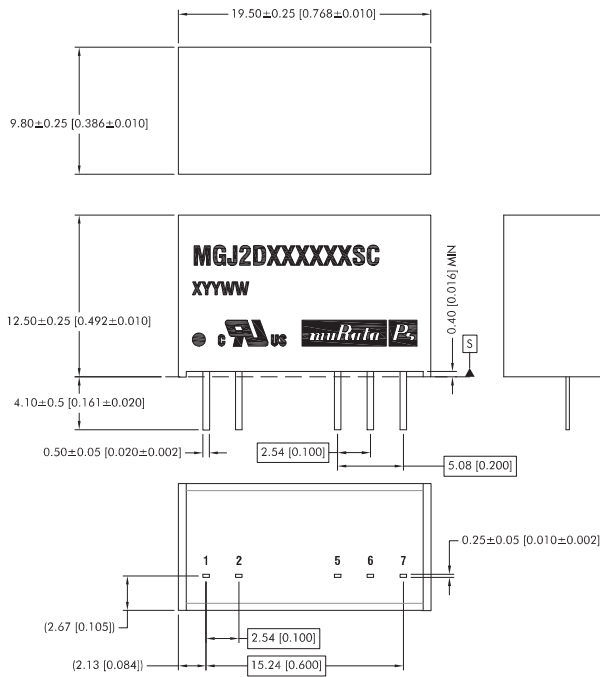

All dimensions in mm ±0.25mm (inches ±0.01). All pins on a 2.54 (0.1) pitch and within ±0.25 (0.01) of true position.


Weight: 4.3g

PIN CONNECTIONS

Pin Output

Pin	Function
1	+V _{IN}
2	-V _{IN}
5	-V _{OUT}
6	OV
7	+V _{OUT}

Tube outline dimensions

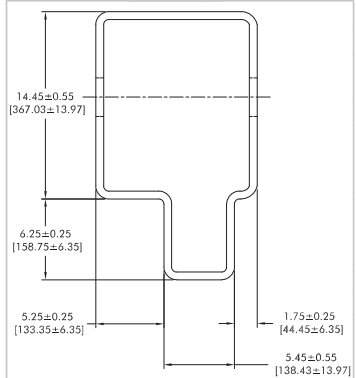


Unless otherwise stated all dimensions in mm (inches).

Tube length : 525mm [20.669] ±2.0 [0.079]

Tube Quantity : 25

RECOMMENDED FOOTPRINT DETAILS

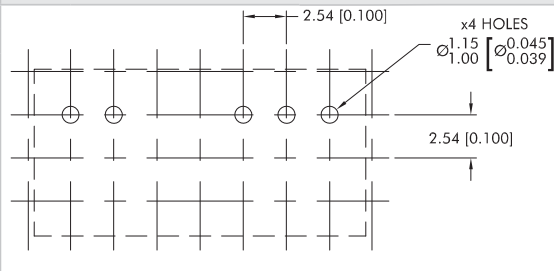

This product is subject to the following **operating requirements** and the **Life and Safety Critical Application Sales Policy**:
 Refer to: <http://www.murata-ps.com/requirements/>

Murata Power Solutions (Milton Keynes) Ltd. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.
 © 2020 Murata Power Solutions (Milton Keynes) Ltd.

www.murata-ps.com/support

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Scan here and get an overview of personal contacts!



sensorsandpower.angst-pfister.com
