

# Model PFLOW4008 Series

MEMS Mass Flow Sensors

---

(VB.1)

CE



## MEMS Mass Flow Sensor

### PFLOW4008 Series

PFLOW4008 is specially customized for Angst+Pfister AG for their proprietary applications.

The sensor is utilizing the Company's MEMS mass flow sensor with customized circuitry and enclosure.




### Specifications

Model	Value		Unit
DN	8		mm
Flow range	0 ~ 2, 5, 10	0 ~ 20, 50	SLPM
Accuracy	$\pm(1.5 + 0.2FS)$		%
Gas compatible	Non-corrosive/non-explosive		
Pressure rating	5		bar a
Max. pressure	8		bar
Mechanical connector	$\Phi 6$ mm/ $\Phi 8$ mm One-touch connectors		
Electrical interface	Linear: IO-Link and analog 0 ~ 10 VDC / I <sup>2</sup> C		
Body	Al-alloy 6063		
Protection rating	IP67		
Power supply	12 ~ 30		Vdc
Working current	< 20		mA
Null shift	$\pm 30$		mVdc
Temperature coefficient	< $\pm 0.12$		%/ $^{\circ}$ C
Maximum pressure loss	30, 200, 800	1100, 4700	Pa
Response time	10		msec
Operation temperature	-10 ~ +55		$^{\circ}$ C
Humidity	<95%RH, no condensation		
CE	EN50081/50082		
Electrical connection	M8		
Standard condition	0 $^{\circ}$ C, 1013 mbar		
Maximum Overflow *	30	200	SLPM


\* The sensors of 0 ~ 2, 0 ~ 5 and 0 ~ 10 SLPM have same flow channels, the maximum overflow is 30 SLPM; While the sensors of 0 ~ 20 and 0 ~ 50 SLPM have same flow channels, the maximum overflow is 200 SLPM.

### Dimensions

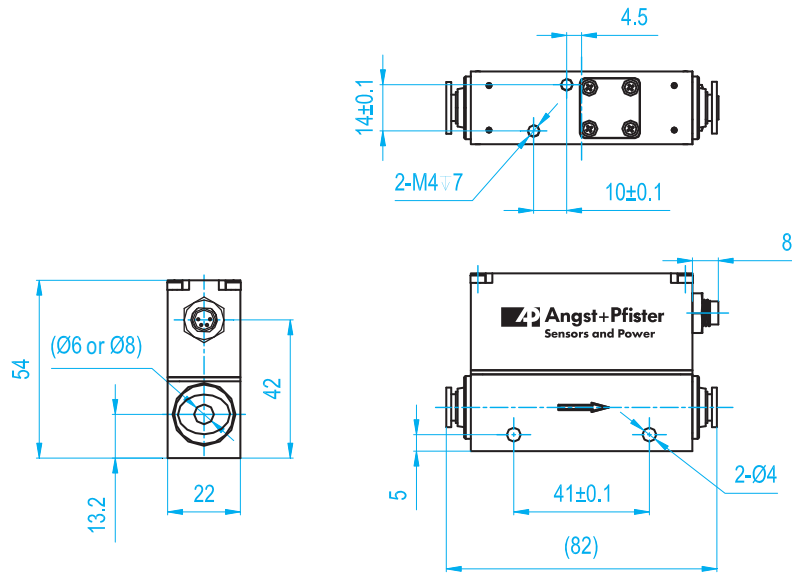


### Electrical connection

Pin #	Definition
1	Power Supply (12 ~ 30 VDC)
2	Analog Output (0 ~ 10 VDC) / I <sup>2</sup> C-SDA
3	GND
4	IO-Link output / I <sup>2</sup> C-SCL

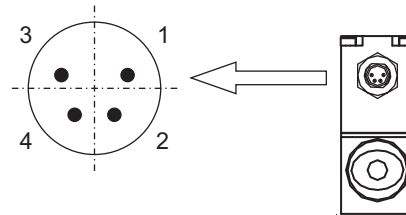

### Sensor selection


The sensor part number is composed of the product model number and suffix indicating the full scale flow rate, mechanical connection, output format as well as the application gas. Refer the following for details.

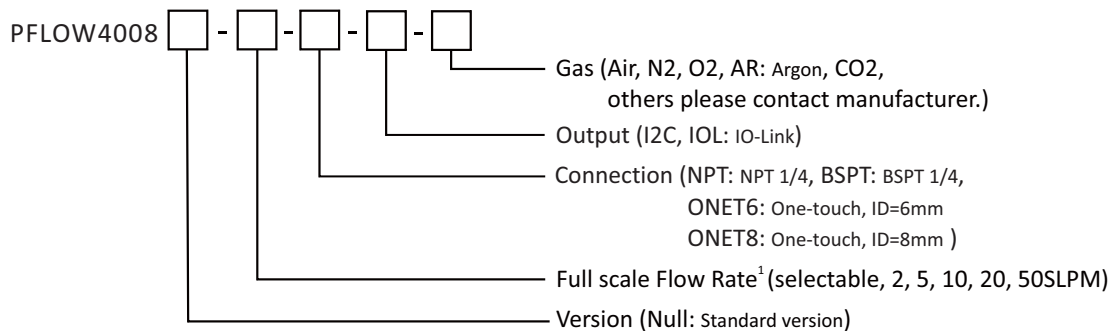

1, Max. flow rate number and Unit, for example, 10SLPM.


## I<sup>2</sup>C Communication

### 1. I<sup>2</sup>C Connection

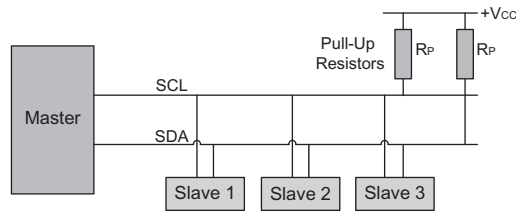

V<sub>cc</sub>: 3.0 ~ 5.5 Vdc  
 R<sub>p</sub>: 1.0 ~ 10.0 kΩ  
 I<sup>2</sup>C bus clock frequency: 100 kHz

### 2. I<sup>2</sup>C Read and Write Sequences

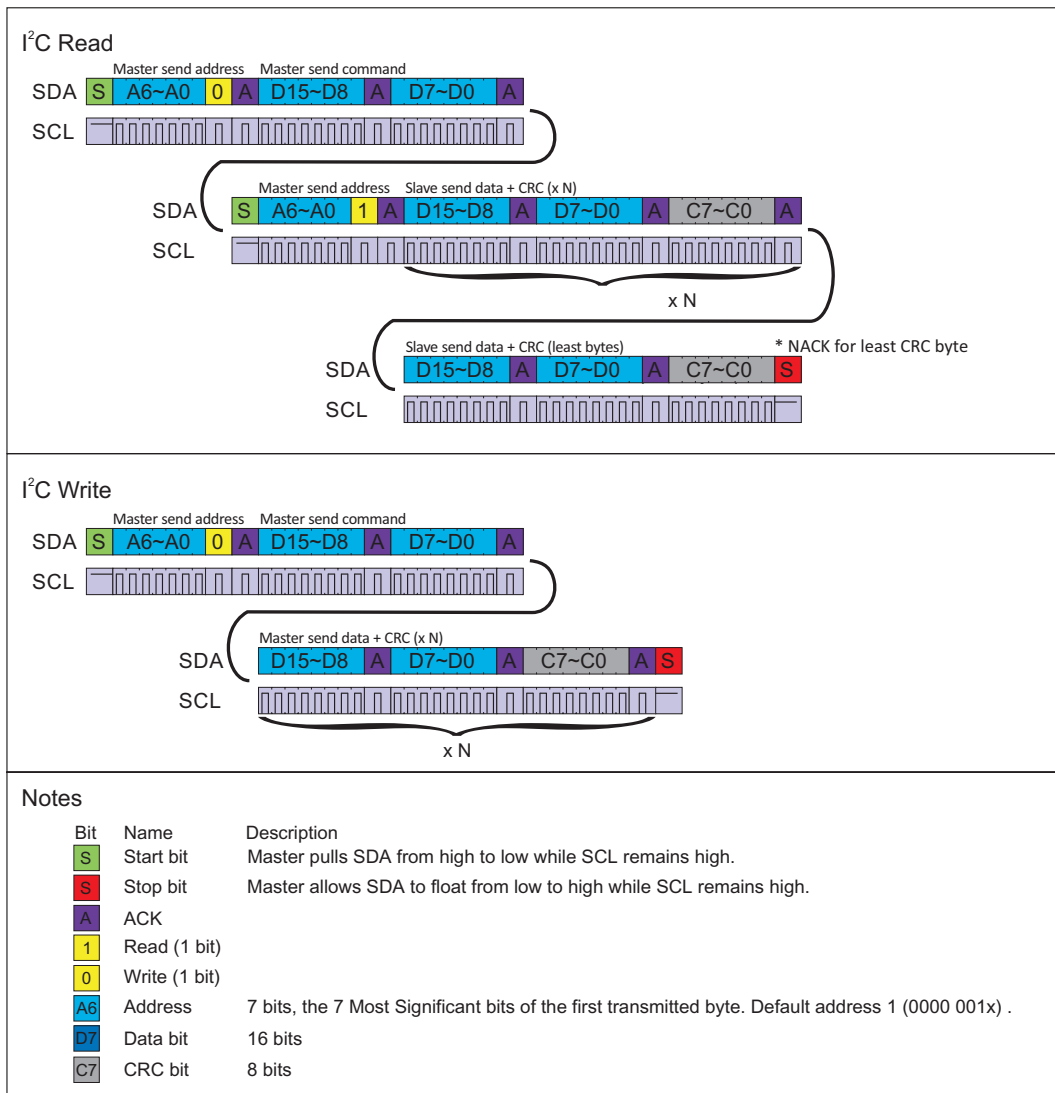

### 3. I<sup>2</sup>C Commands Description

Command Byte	Length (int16)	Command Name	R/W	Notes
0x00A4	1	I <sup>2</sup> C address	R/W	Int16. bit15 ~ bit8 = 0, bit7 ~ bit1 are available <sup>(1)</sup> , bit0 is the R/W flag bit.
0x0030	6	Sensor SN	R	ASCII
0x003A	2	Flow rate	R	Int32(/1000 SLPM)
0x00F0	1	Calibrate the offset of differential pressure	W	Fixed value, 0xAA55

1. The address is set with bit7 ~ bit1. For instance, sensor I<sup>2</sup>C address 4, write address will be 0x08 (0000 1000) , while read address will be 0x09 (0000 1001).

### 4. CRC Checksum Calculation

The 8-bit CRC checksum transmitted after each two data bytes (int 16) is generated by a CRC algorithm. Its properties are listed in below table. To calculate the checksum, only these two previously transmitted data bytes are used.

Property	Value
Name	CRC - 8
Protected data	I <sup>2</sup> C read and write
Width	8 bits
Polynomial	0x07 ( $x^8 + x^2 + x + 1$ )
Initialization	0x00
Reflect input	False
Reflect output	False
Final XOR	0x00
Example	CRC(0x4E20) = 0x6D

## Safety and Maintenance

### Safety Precautions

The sensors cannot be used for gas metrology of fluoride or fluoride containing gases. For updates of the product certification information, please contact manufacturer. Use for other gases such as extreme corrosive and toxic may cause the product malfunctioning or even severe damages. The product sealing is ensured to work under working pressure of 0.8 MPa and is leakage proof before the shipment. But cautions and further leakage test are important at installation as well since any leakage could cause severe safety issue. The power supply for this product is a lithium battery, all precautions and measures for electrical voltage handling must apply.

**Attention: any alternation and/or improper use of the product without the permission of the manufacturer can cause unpredicted damages and even injuries or other severe situations. APSP or any of its employees, subsidiaries shall not be hold and indemnified against such consequences due to such circumstances via improper use of the product.**

### Maintenance

**Attention:** without prior permission of the manufacturer, please do not attempt to alter any parts of the product as it may cause unrecoverable damages. If there are questions or doubts, please contact manufacturer immediately before further actions.

All maintenance of the sensor should be performed by trained and certified personnel by APSP.

This document contains information for a product that is just released or under further development. APSP and its subsidiaries reserve the rights to change the specifications and or descriptions without prior notice.

Headquarter Switzerland:  
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
sensorsandpower@angst-pfister.com

Office Germany:  
Angst+Pfister Sensors and Power  
Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 0  
sensorsandpower.de@angst-pfister.com



## We are here for you. Addresses and Contacts.

### Sales Germany & Austria

Geometrical sensors  
Other products

Kurt Stritzelberger  
Phone +49 89 374 288 87 22  
kurt.stritzelberger@angst-pfister.com

Pressure sensors  
Other products

Gerhard Vetter  
Phone +49 89 374 288 87 26  
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei  
Phone +41 44 877 35 18  
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

### Sales International Key Accounts

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Other Countries / Product Management

Pressure Sensors  
Load Cells

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@angst-pfister.com

Gas sensors  
Gas sensor modules

Dr. Thomas Clausen  
Phone +49 89 374 288 87 24  
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 89 374 288 87 67  
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@angst-pfister.com

Linear position sensors  
Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@angst-pfister.com

Accelerometers  
Sensor elements

Christoph Kleye  
Phone +49 89 374 288 87 61  
christoph.kleye@angst-pfister.com

Drive technology  
CH Postcode 5000 – 9999 / DE

Roman Homa  
Phone +41 76 444 00 86  
roman.homa@angst-pfister.com

Drive technology  
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

Harald Thomas  
Phone +49 89 374 288 87 23  
harald.thomas@angst-pfister.com