

SHAFT TYPE

38S Model




Small Standard Model

•Wide Range of Resolution from 100 to 4096 P/R.

Model




38S - [] [] - [] [] - 6 - 50 - B00E

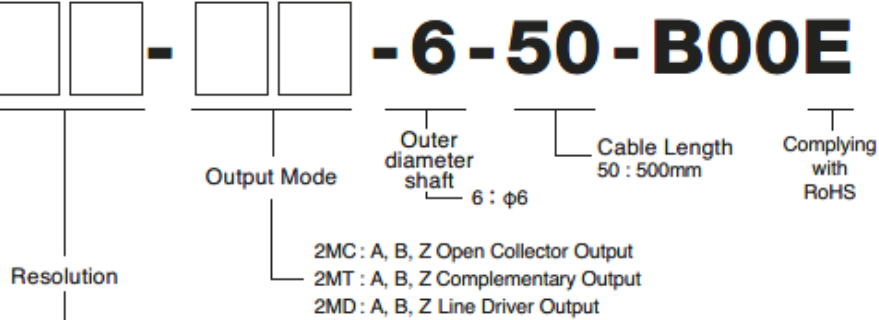


100	100 P/R	360	360 P/R	600	600 P/R	2000	2000 P/R	4000	4000 P/R
200	200 P/R	400	400 P/R	800	800 P/R	2048	2048 P/R	4096	4096 P/R
250	250 P/R	500	500 P/R	1000	1000 P/R	2500	2500 P/R	-	-
300	300 P/R	512	512 P/R	1024	1024 P/R	3600	3600 P/R	-	-

External Dimension

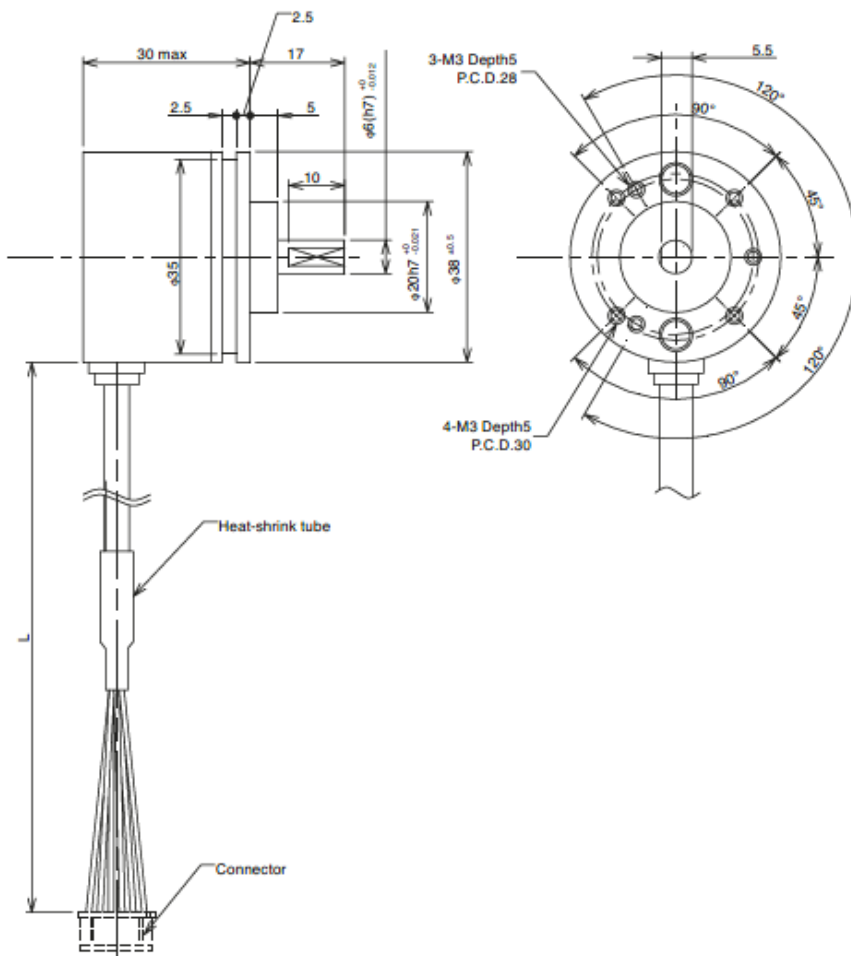

Output Circuit


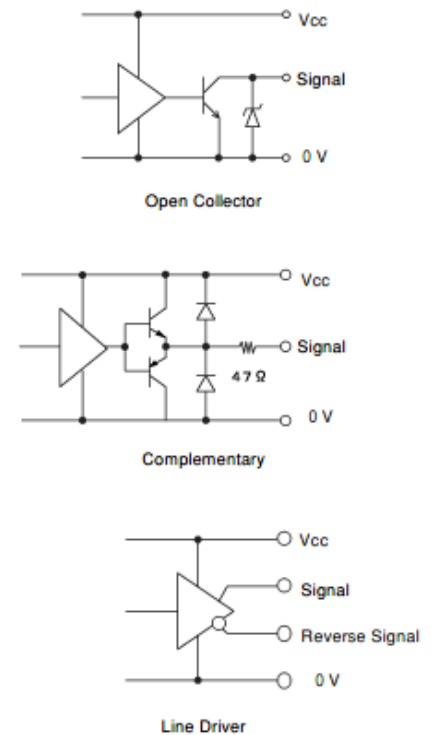


Electrical Spec

TYPE		2MC	2MT	2MD
Power Supply(Vcc)		DC 4.5 to 30V (Ripple 3% or less(P-P))		DC 4.5 to 13.2V (Ripple 3% or Less(P-P))
Current Consumption		30mA Max	60mA Max	30mA Max
Output Voltage	"H"	-	Vcc -3V Min	2.5V Min
	"L" *1	0.5V Max	3V Max	0.5V Max
Maximum Sink Current		40mA		20mA
Maximum Frequency Response	1024P/R or less	120kHz		
	2000P/R or more	240kHz		
Rise & Fall Time		1μs Max	200ns Max	100ns Max

*1) at Maximum Sink Current

Wave Form

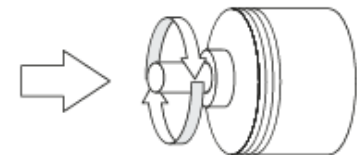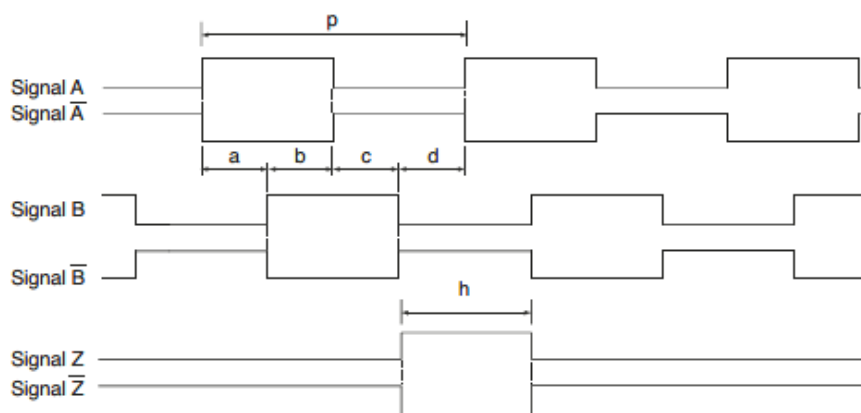

$$P = 1 / \text{Resolution}$$

Line driver output is available for only A, B, Z signal.

$$\text{Signal A,B} \quad a, b, c, d = (P/4) \pm (P/8)$$

$$\text{Duty} = (P/2) \pm (P/4)$$

$$\text{Signal Z} \quad (P/4) \leq h \leq (3P/4)$$

Electrical Connections

Connector Hirose Electric Co., Ltd. DF3-6S-2C

Open Collector · Complementary		
1	Red	Vcc
2	Black	0 V
3	Blue	Sig A
4	White	Sig B
5	Yellow	Sig Z
6	Shield	N.C

Connector Hirose Electric Co., Ltd. DF3-9S-2C

Line Driver		
1	Red	Vcc
2	Black	0 V
3	Green	Sig A
4	Blue	Sig A-bar
5	White	Sig B
6	Gray	Sig B-bar
7	Yellow	Sig Z
8	Orange	Sig Z-bar
9	Shield	N.C

Mechanical Spec

Starting Torque	0.98×10 ⁻³ N·m Max	
Angular Acceleration	1×10 ⁵ rad·s ²	
Shaft Loading	Thrust	19.6N
	Radial	29.4N
Moment of Inertia	8×10 ⁻⁷ kg·m ²	
Maximum Permissible Speed	6000min ⁻¹	
Net Weight	100g Max(Without Cable)	

Environmental Spec

Operating Temperature	-10°C~+85°C
Storage Temperature	-30°C~+85°C
Humidity	RH 85% Max No Condensation
Vibration	10~55 Hz / 1.5mm X, Y, Z Each 2h
Shock	490m/s ² , 11ms X, Y, Z Each 3 times
Ingress Protection	IP50

Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com