



SGX-SureCO 2 Electrode Carbon Monoxide Sensor

Application : Domestic CO detectors
Air Quality monitors

PERFORMANCE

Range.....0 – 1000 ppm
Output Signal..... 45 ± 15 nA / ppm
Repeatability..... $< \pm 5\%$ CO equivalent
Linearity.....Within $\pm 5\%$
Response time, t_{90} < 30 Seconds
Maximum Overload.....2000 ppm
Long-term output drift..... $< 5\%$ per Annum
Recommended Load Resistor.....10 Ohms
Warranty.....60 months from date of dispatch

OPERATING CONDITIONS

Temperature Range..... -30°C to $+50^{\circ}\text{C}$
Operating Humidity.....15% to 90% RH
Pressure Range.....800 to 1200 mbar
Recommended Storage Temperature..... 0°C to 20°C
Expected Operating Life..... > 6 years in normal use

INTRINSIC SAFETY DATA

Maximum at 2000 ppm.....0.3 mA
Maximum o/c Voltage.....1.3 V
Maximum s/c Current..... < 1.0 A

CROSS-SENSITIVITY DATA




Gas	CONC.	SGX-SureCO
Hydrogen Sulfide	25 ppm	0 ppm
Sulfur Dioxide	20 ppm	< 0.5 ppm
Hydrogen	100 ppm	< 20 ppm
Nitric Oxide	50 ppm	< 10 ppm
Ethanol	2000 ppm	< 5 ppm
Iso-Propanol	200 ppm	0 ppm
Chlorine	2 ppm	< 0.5 ppm
Acetone	1000 ppm	0 ppm
Acetylene	40 ppm	80 ppm

Note: This table is for reference only. Calibration should be carried out with the actual gas at a known concentration.

This device is designed to be RoHS compliant.

PRODUCT DIMENSIONS

All dimensions in mm
All tolerances ± 0.15 mm




IMPORTANT NOTES

All performance is based on conditions at 20°C , 50% RH and 1 atm, using SGX recommended circuitry.

Sensor performance is temperature dependant; please contact SGX for temperature performance other than 20°C .

Do not solder to the connector pins as this may damage the sensor and thereby invalidate the warranty.

Details on recommended connector pins can be found in the Frequently Asked Questions within the Gas Sensor section of the SGX website.

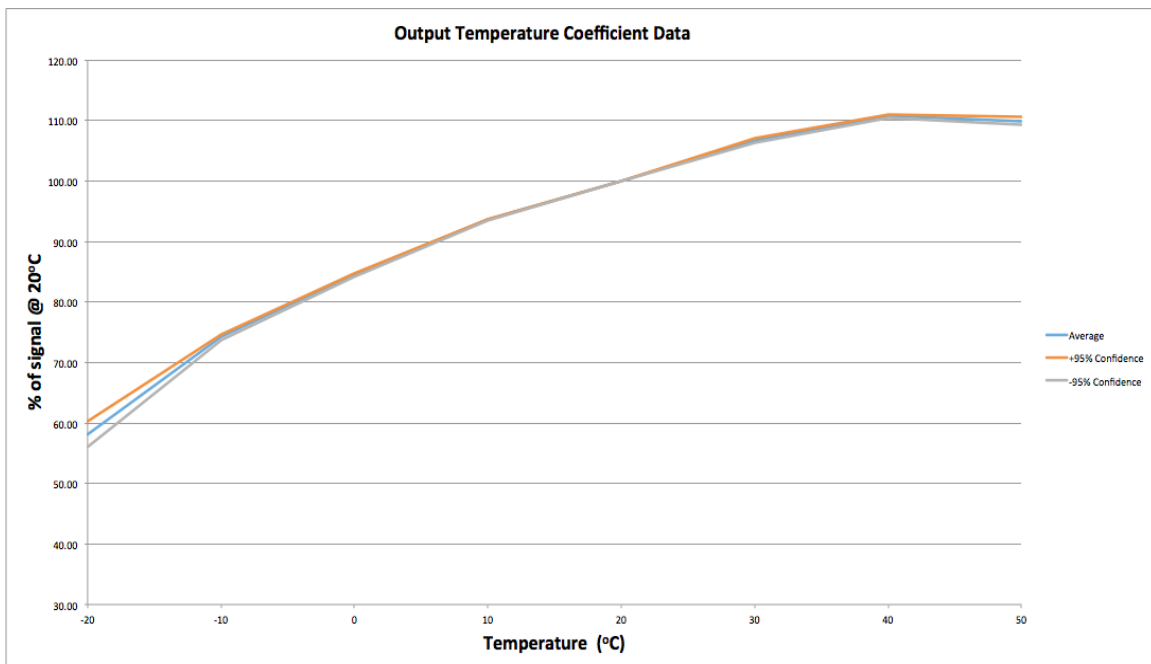

POISONING

SGX sensors are designed to operate in a wide range of harsh environments and conditions. However it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation. When using sensors on printed circuit boards (PCBs), degreasing agents should be used prior to the sensor being fitted.

Headquarter Switzerland:
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:
Angst+Pfister Sensors and Power
Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 0
sensorsandpower.de@angst-pfister.com



We are here for you. Addresses and Contacts.

Sales Germany & Austria

Geometrical sensors
Other products

Kurt Stritzelberger
Phone +49 89 374 288 87 22
kurt.stritzelberger@angst-pfister.com

Pressure sensors
Other products

Gerhard Vetter
Phone +49 89 374 288 87 26
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei
Phone +41 44 877 35 18
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Sales International Key Accounts

Peter Felder
Phone +41 44 877 35 05
peter.felder@angst-pfister.com

Sales Other Countries / Product Management

Pressure Sensors
Load Cells

Philipp Kistler
Phone +41 44 877 35 03
philipp.kistler@angst-pfister.com

Gas sensors
Gas sensor modules

Dr. Thomas Clausen
Phone +49 89 374 288 87 24
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli
Phone +49 89 374 288 87 67
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio
Phone +41 44 877 35 06
sebastiano.leggio@angst-pfister.com

Linear position sensors
Angle sensors

Eric Letsch
Phone +41 44 877 35 14
eric.letsch@angst-pfister.com

Accelerometers
Sensor elements

Christoph Kleye
Phone +49 89 374 288 87 61
christoph.kleye@angst-pfister.com

Drive technology
CH Postcode 5000 – 9999 / DE

Roman Homa
Phone +41 76 444 00 86
roman.homa@angst-pfister.com

Drive technology
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher
Phone +41 76 444 57 93
christian.mohrenstecher@angst-pfister.com

Harald Thomas
Phone +49 89 374 288 87 23
harald.thomas@angst-pfister.com