


PRODUCT DATA SHEET

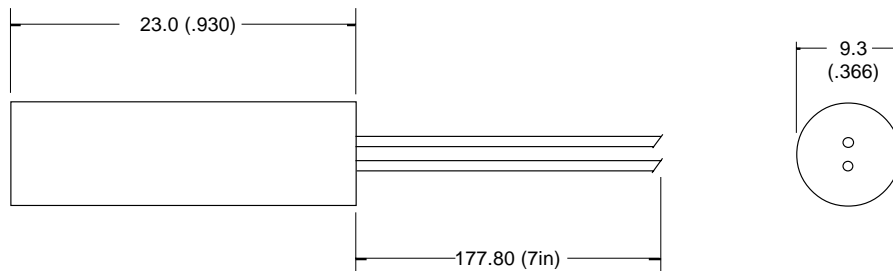


Drawings not to scale
All dimensions in mm (inches) nominal

Differential angle varies if pins are aligned vertically
(as drawn) or horizontally

These switches operate when tilted from the horizontal position. The switch movement required to cause contact change (example off to on) is called the differential angle. It is very important when designing a tilt switch to allow for the differential angle and understand that when in the horizontal position the switch contact may be open or closed.

SWITCHING VOLTAGE

Unless specified switches can be used on AC and DC loads. For DC voltages reduce AC rating to 70%.

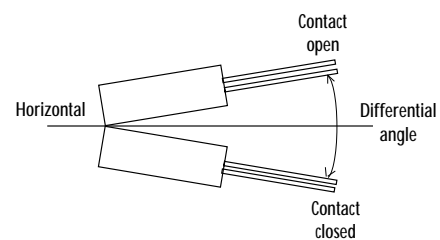

SPECIFICATION

CONTACT FORM/STYLE		See above
SWITCHING VOLTAGE	Max. Vac	240
SWITCHING CURRENT	Max. A	0.2 at 240 Vac / 0.25 at 120 Vac
SWITCHING CAPACITY	Max. VA	30
CONTACT RESISTANCE	Max. Ω	1.0
DIFFERENTIAL ANGLE	Max. Deg $^{\circ}$	20
OPERATING TEMPERATURE	Deg. $^{\circ}$ C	-20 $^{\circ}$ + 70 $^{\circ}$
STORAGE TEMPERATURE	Deg. $^{\circ}$ C	-25 $^{\circ}$ + 70 $^{\circ}$
CASE MATERIAL		-
CABLE/TERMINATION		26 AWG wire insulated
FEATURES		Robust Construction

NOTE: When cutting or bending switch leads it is important that the glass seal is not damaged. The cutting or bending point should be no closer than 3mm (.118) to the glass to metal seal and the lead should be supported between the cutting or bending point and the glass to metal seal.

TILT SWITCH MODULE - Mercury Contact

PART NUMBER
CM 1320-70

Rev. No.	Revision Note	Date	Signature
B	Web Site 2001	1-2-01	RG

As part of the company policy of continued product improvement, specifications may change without notice. Our sales office will be pleased to help you with the latest information on this product range and details of our full design and manufacturing service. All products are supplied to our standard conditions of sale otherwise agreed in writing.

©2001

We are here for you. Addresses and Contacts.

Headquarter Switzerland:

Angst+Pfister Sensors and Power AG
Thurgauerstrasse 66
CH-8050 Zurich
Phone +41 44 877 35 00
sensorsandpower@angst-pfister.com

Office Germany:

Angst+Pfister Sensors and Power Deutschland GmbH
Edisonstraße 16
D-85716 Unterschleißheim
Phone +49 89 374 288 87 00
sensorsandpower.de@angst-pfister.com

Scan here and get an overview of personal contacts!



sensorsandpower.angst-pfister.com
