

New

# CRH02

## High Performance Single Axis MEMS Gyroscope



### Key features

- Proven and Robust silicon MEMS VSG3Q<sup>MAX</sup> vibrating ring sensor
- Four rate ranges available:  $\pm 25^\circ/\text{s}$ ,  $\pm 100^\circ/\text{s}$ ,  $\pm 200^\circ/\text{s}$  and  $\pm 400^\circ/\text{s}$
- FOG - like performance
- Low Bias Instability -  $0.12^\circ/\text{hr}$  ( $100^\circ/\text{s}$ )
- Excellent Angle Random Walk -  $0.17^\circ/\sqrt{\text{hr}}$
- Low noise -  $0.15^\circ/\text{s rms}$
- Precision analogue output
- High shock and vibration rejection
- $-40^\circ\text{C}$  to  $+85^\circ\text{C}$  operating temperature range
- Temperature sensor output for precision thermal compensation
- MEMS frequency output for precision thermal compensation
- RoHS Compliant

**SILICON  
SENSING**


CRH02 provides the optimum solution for applications where bias instability, angle random walk and low noise are of critical importance.

At the heart of the CRH02 is Silicon Sensing's VSG3Q<sup>MAX</sup> vibrating ring MEMS sensor which is at the pinnacle of 15 years of design evolution and the latest off a line which has produced over 30 million high integrity MEMS inertial sensors. The VSG3Q<sup>MAX</sup> gyro sensor is combined with precision discrete electronics to achieve high stability and low noise, making the CRH02 a viable alternative to Fibre-Optic Gyro (FOG) and Dynamically Tuned Gyro (DTG).

An on board temperature sensor and the resonant frequency of the MEMS enables additional external conditioning to be applied to the CRH02 by the host, enhancing the performance even further.

### Typical applications

- Aerospace Applications
- Platform Stabilization
- Precision Surveying
- Maritime Guidance and Control
- Gyro-compassing and Heading Control
- Autonomous Vehicles and ROVs
- Rail Track monitoring
- Robotics
- Drilling Equipment and Guidance
- Inertial Measurement Units

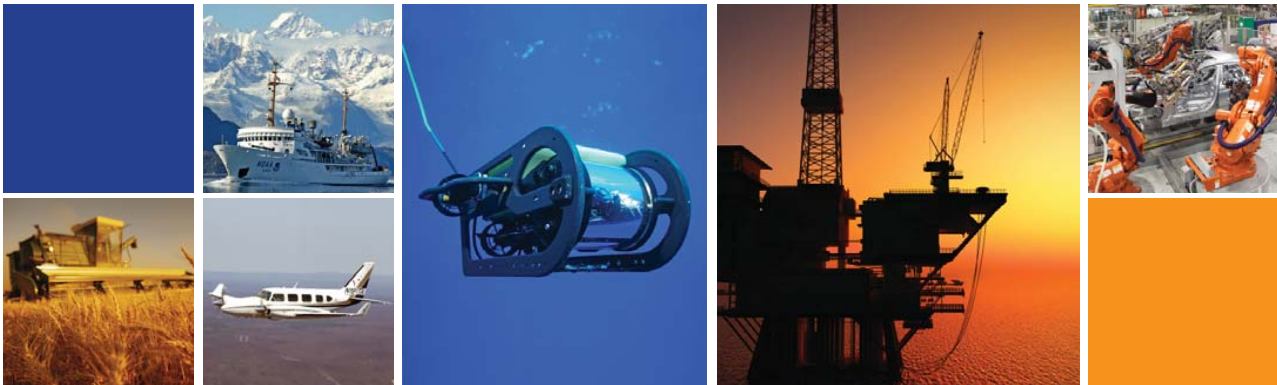


© Silicon Sensing is an Atlantic Inertial Systems, Sumitomo Precision Products joint venture company

# CRH02

## High Performance Single Axis MEMS Gyroscope

For full technical datasheet please visit our website:  
www.siliconsensing.com

All dimensions in millimetres

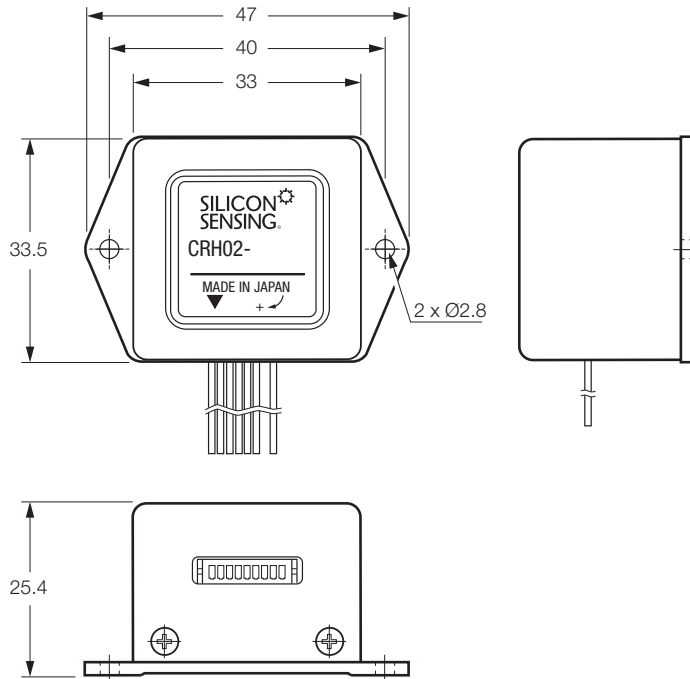

Part Number	Rate Range
CRH02-025	±25°/s
CRH02-100	±100°/s
CRH02-200	±200°/s
CRH02-400	±400°/s

### Pin Connections

1	VCC
2	GND
3	Rate Output
4	Ref
5	REFL
6	Temperature Output
7	DNC
8	FRQ
9	DNC

### Typical Data

Parameter	-025	-100	-200	-400
Output	Analogue			
Dynamic range	±25°/s	±100°/s	±200°/s	±400°/s
Nominal scale factor	80mV/°/s	20mV/°/s	10mV/°/s	5mV/°/s
Bias instability	< 0.12°/h			
Angular Random Walk	< 0.017°/√hr			
Bias over temperature	±0.1°/s	±0.1°/s	±0.15°/s	±0.15°/s
Bandwidth	50Hz	100Hz	100Hz	50Hz
Supply voltage	+4.85 to 5.25 Volts			
Current consumption	< 60mA			
Operating temperature range	-40°C to +85°C			
Storage temperature range	-40°C to +85°C			
Start-up time	750ms (max)			
Quiescent noise	0.15°/s rms	0.20°/s rms	0.20°/s rms	0.15°/s rms
Mass	45 gram			
Operational shock	95g x 6ms			
Shock (powered survival)	1,000g x 1ms			
RoHS Compliant	Yes			

Silicon Sensing Systems Limited  
Clifford Road, Southway,  
Plymouth, Devon  
PL6 6DE United Kingdom

T +44 (0)1752 723330  
F +44 (0)1752 723331  
E sales@siliconsensing.com  
W siliconsensing.com

Silicon Sensing Systems Japan Limited  
1-10 Fuso-Cho,  
Amagasaki,  
Hyogo 6600891, Japan

T +81 (0)6 6489 5868  
F +81 (0)6 6489 5919  
E sssj@spp.co.jp  
W siliconsensing.com

Specification subject to change without notice.

© Copyright 2015  
Silicon Sensing Systems Limited  
All rights reserved. Printed in England 02/15

CRH02-00-0100-131 Rev1  
DCR No. 710008487

Silicon Sensing Systems Limited Registered in England & Wales No. 3635234 Clifford Road, Southway, Plymouth, Devon PL6 6DE  
The device mark Silicon Sensing is a registered trade mark of Silicon Sensing Systems Community Trade Mark 003587664

Headquarter Switzerland:  
Angst+Pfister Sensors and Power AG

Thurgauerstrasse 66  
CH-8050 Zurich  
Phone +41 44 877 35 00  
sensorsandpower@angst-pfister.com

Office Germany:  
Angst+Pfister Sensors and Power  
Deutschland GmbH  
Edisonstraße 16  
D-85716 Unterschleißheim  
Phone +49 89 374 288 87 0  
sensorsandpower.de@angst-pfister.com



## We are here for you. Addresses and Contacts.

### Sales Germany & Austria

Geometrical sensors  
Other products

Kurt Stritzelberger  
Phone +49 89 374 288 87 22  
kurt.stritzelberger@angst-pfister.com

Pressure sensors  
Other products

Gerhard Vetter  
Phone +49 89 374 288 87 26  
gerhard.vetter@angst-pfister.com

Gas sensors and modules

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Switzerland & Liechtenstein

Postcode 3000 – 9999

Basil Frei  
Phone +41 44 877 35 18  
basil.frei@angst-pfister.com

Postcode 1000 – 2999

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

### Sales International Key Accounts

Peter Felder  
Phone +41 44 877 35 05  
peter.felder@angst-pfister.com

### Sales Other Countries / Product Management

Pressure Sensors  
Load Cells

Philipp Kistler  
Phone +41 44 877 35 03  
philipp.kistler@angst-pfister.com

Gas sensors  
Gas sensor modules

Dr. Thomas Clausen  
Phone +49 89 374 288 87 24  
thomas.clausen@angst-pfister.com

Flow / Level / Medical products

Dr. Adriano Pittarelli  
Phone +49 89 374 288 87 67  
adriano.pittarelli@angst-pfister.com

Power supplies

Sebastiano Leggio  
Phone +41 44 877 35 06  
sebastiano.leggio@angst-pfister.com

Linear position sensors  
Angle sensors

Eric Letsch  
Phone +41 44 877 35 14  
eric.letsch@angst-pfister.com

Accelerometers  
Sensor elements

Christoph Kleye  
Phone +49 89 374 288 87 61  
christoph.kleye@angst-pfister.com

Drive technology  
CH Postcode 5000 – 9999 / DE

Roman Homa  
Phone +41 76 444 00 86  
roman.homa@angst-pfister.com

Drive technology  
CH Postcode 1000 – 4999 / AT / IT / FR

Christian Mohrenstecher  
Phone +41 76 444 57 93  
christian.mohrenstecher@angst-pfister.com

Harald Thomas  
Phone +49 89 374 288 87 23  
harald.thomas@angst-pfister.com